

K101-A2

HORN WITH LED INDICATION


DEMA K101-A2 Horns and visual indicators are annunciator devices which are usually employed in industrial facilities and system rooms.

The new double channel "K 101 - A2" horn with LED indication combines a high volume horn and LED indicators to provide an integrated acoustic & visual annunciating terminal. The 2 LEDs and the dip-switch set horn with 32 different tone combinations make the K 101 - A2 an ideal solution for the mentioned purposes.


K 101 - A2 provides the highest level of sound and illumination in its class, while ensuring continuous service with modern electronics. K 101 - A2 have various models for any auxiliary supply voltages.



K101-A2 DIMENSIONS

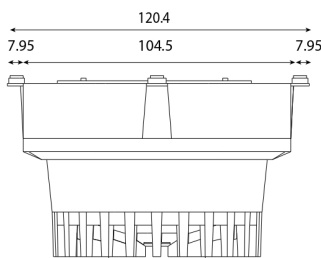

K101-A2 TOP VIEW


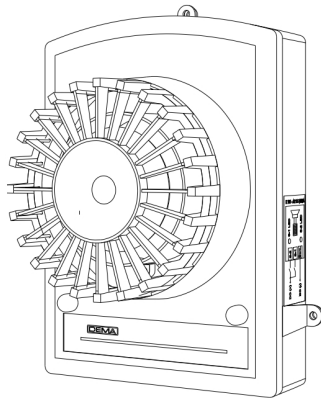


K101-A2 PERSPECTIVE VIEW


SPECIFICATIONS

- 110 V_{AC} / 110 V_{DC} models.
- provides the highest level of sound and illumination
- 2 LEDs (yellow - red)
- selectable 32 tone groups
- IP20 protection level.

CERTIFICATES

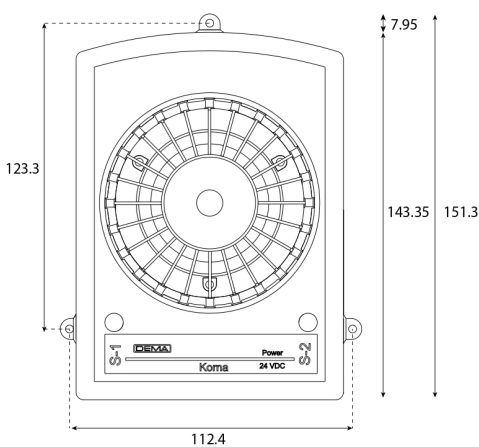

K101-A2 FRONT VIEW

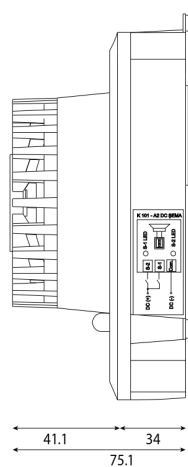


K101-A2 SIDE VIEW



K101-A2 HORN WITH LED INDICATION

K101-A2 CIRCUIT DIAGRAM

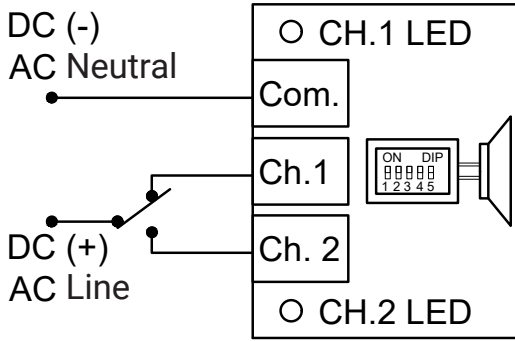


Ch.1: Red LED
Ch.2: Yellow LED



TECHNICAL SPECIFICATIONS

Nominal Supply Voltage (Un)	24 V _{DC}	48 V _{DC}	110 V _{DC}	220 V _{DC}	(110-230) V _{DC}
Announcing Channels	2 inputs				
Operating Voltage Limits	(-20% + 15%)Un				(-20% + 10%) Un
Standby Power Consumption	0 W				0 V·A
Max. Power Consumption (U = Umax)	2.0 W	2.7 W	4.6 W	10.8 W	13.7 V·A
Terminal Type / Cable Data	Plug & socket terminal for q ≤ 1.5 mm ² stranded or single-core cable entry				
Sound Pressure Level (U = 1.0 Un, d = 1 m)	(85 - 98) dB				
Tone Quantity	32 tones				
Selectable Tone Groups	32 tone groups				
LED Quantity	2 high lumen, wide angle view LEDs; red and yellow				
Dimensions	Width= 120.4 mm / Height = 151.3 mm / Depth = 75.1 mm				
Mounting Position	Vertical				
Environmental Protection Level	IP20				
Weight	263 g				

K101-A2 BOTTOM VIEW

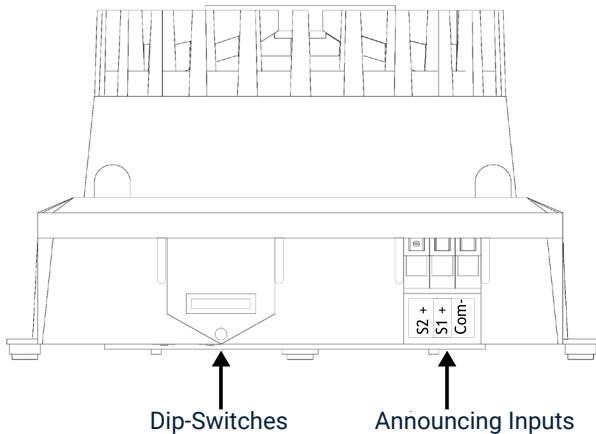

DEMA RELAY INDUSTRY INC.

Tel: +90 (216) 352 77 34-35 / Fax: +90 (216) 442 17 95 / info@demarole.com.tr / www.demarole.com.tr

DEMA