

VERIFICATION REPORT

IEC 61850 Edition 2 server conformance test of MPM 400.D, VPM 400.D, CPM 400.D and DPM 400.D

DEMA ROLE

Report no.: 16-2129, Rev.

Date: 2016-07-08



Report title: IEC 61850 Edition 2 server conformance test of DNV GL - Energy
MPM 400.D, VPM 400.D, CPM 400.D and DPM Energy Advisory
400.D Utrechtseweg 310-B50
Customer: DEMA ROLE, Zumrutevler Mh. Ataturk Cd. 6812 AR ARNHEM
Inanc Sk. No: 4 34852 The Netherlands
Maltepe, Istanbul
Turkey Tel.: +31 26 356 9111
Contact person: Ali Karadimir Registered Arnhem 09080262
Date of issue: 2016-07-08
Project No.: 10004271
Organisation unit: OPE/INC
Report No.: 16-2129, Rev.

Task and objective:

Does the protocol implementation of the DUT, conform to the IEC 61850 standard and the PICS, MICS, PIXIT and ICD specifications as configured with SCD?

Prepared by:



Richard Schimmel
Test Engineer

Verified by:



Gerard Akse
Test Engineer

Approved by:



Pierfrancesco Cioci
Head of Section INC/PCTC

- Unrestricted distribution (internal and external) Keywords:
 Unrestricted distribution within DNV GL
 Limited distribution within DNV GL after 3 years
 No distribution (confidential)
 Secret

Reference to part of this verification report which may lead to misinterpretation is not permissible. The Rules and regulations for an Attestation of Conformity or a Certificate based on testing of communication interfaces performed by DNV GL, June 2014 is applicable to this verification report.

Rev. No.	Date	Reason for Issue	Prepared by	Verified by	Approved by
0	2016-07-08	First issue			

Table of contents

1	INTRODUCTION.....	2
1.1	Identifications	2
1.2	Background	3
1.3	Purpose of this document	3
1.4	Contents of this document	3
1.5	Glossary	3
2	REFERENCES.....	4
2.1	Normative	4
2.2	Other	4
3	THE CONFORMANCE TEST.....	5
3.1	Components in the test environment	5
3.2	Overview of the test suite	5
4	TEST RESULTS	6
5	CONCLUSIONS AND RECOMMENDATIONS.....	7
5.1	Recommendations following from the test	7
	APPENDIX A	1
A1	Documentation (IEC 61850-4)	1
A2	Configuration file (IEC 61850-6)	2
A3	Data model (IEC 61850-7-3 and IEC 61850-7-4)	3
A4	Mapping of ACSI models and services (IEC 61850-7-2 and applicable SCSM)	6
A4.1	Application association	10
A4.2	Server & Logical Device & Logical Node & Data	14
A4.3	Data set	20
A4.6	Setting group control	24
A4.7	Unbuffered Reporting	32
A4.8	Buffered Reporting	42
A4.10a	GOOSE Publish	57
A4.10b	GOOSE Subscribe	62
A4.11	Control	68
A4.11a	Control DOns	71
A4.12	Time synchronization	73
A4.13	File transfer	75

1 INTRODUCTION

1.1 Identifications

The following table gives the exact identification of tested equipment and test environment used for this conformance test.

<i>DUT (fully tested)</i>	MPM 400.D Multifunction Motor Protection Relay Software version: 1.0 S/N: D.MPM.0014
<i>MANUFACTURER</i>	DEMA ROLE Zumrutevler Mh. Ataturk Cd. Inanc Sk. No: 4 34852 Maltepe, Istanbul Turkey
<i>PICS</i>	Protocol Implementation Conformance Statement for the IEC 61850 interface of DEMA MPM 400.D, DEMA DPM 400.D, DEMA CPM 400.D and of DEMA VPM 400.D, June 3, 2016
<i>MICS</i>	Model Implementation Conformance Statement for the IEC 61850 interface in DEMA MPM 400.D, June 21, 2016
<i>TICS</i>	TISSUES Implementation Conformance Statement for the IEC 61850 Ed2 interface in DEMA MPM 400 D, DPM 400 D, CPM 400 D, VPM 400 D, June 21, 2016
<i>PIXIT</i>	Protocol Implementation eXtra Information for Testing (PIXIT) for the IEC 61850 interface in DEMA MPM 400D DEMA, DPM 400.D, DEMA CPM 400.D and of DEMA VPM 400.D, June 2, 2016
<i>ICD</i>	DEMA_MPM_400D.icd, version="1"
<i>SCD</i>	Not supported
<i>TEST INITIATOR</i>	<i>MANUFACTURER</i>
<i>TEST FACILITY</i>	KEMA Nederland B.V. Protocol Competence & Test Center Utrechtseweg 310-B50, Arnhem, The Netherlands Accredited as independent Level A test lab by the UCAiug
<i>TEST ENGINEER</i>	Richard Schimmel, Richard.schimmel@dnvgl.com
<i>TEST SESSION</i>	March-July 2016
<i>CLIENT SIMULATOR</i>	UniCA 61850 Client Simulator 4.29.03 with test suite Ed2 4.31.05
<i>ANALYSER</i>	UniCA 61850 Analyzer 5.31.00
<i>EQUIPMENT SIMULATOR</i>	PCTC IO-unit
<i>TIME MASTER</i>	DNV KEMA SNTP server
<i>DUT variants partly tested</i>	<ul style="list-style-type: none">• VPM 400.D Voltage & Frequency Protection Relay• CPM 400.D Multifunction Current Protection Relay• DPM 400.D Multifunction Directional Protection Relay
<i>ICD variants</i>	DEMA_MPM_400D.icd (the MPM and DPM have the same data model) DEMA_CPM_400D.icd DEMA_VPM_400D.icd

1.2 Background

The *TEST FACILITY*'s assignment was to answer the following question:

"Does the protocol implementation of the DUT conform to the Edition 2 of the IEC 61850 standard and the PICS, MICS, PIXIT and ICD specifications as configured with SCD?"

To answer this question, *TEST FACILITY* has performed a **conformance test** of the IEC 61850 implementation in the *DUT*. This test has been performed according procedures and conditions set forth in IEC 61850 part 10 and UCAIUG Quality Assurance Program.

TEST FACILITY is accredited/recognized by the UCAIUG to perform formal conformance tests and issue the Level A UCAIUG certificate.

1.3 Purpose of this document

The purpose of this document is to describe the conformance test procedure and results of the *TEST SESSION* concerning the IEC 61850-8-1 server implementation in the *DUT*.

The described procedures and test results are the basis for the UCAIug Level A certificate.

1.4 Contents of this document

Chapter 2 shows the list of relevant normative and other references, used to provide input for the conformance test.

Chapter 3 describes the various relevant components for the conformance test and their configuration as used in the conformance test, including the *DUT*. This chapter also gives an overview and introduction to the various test groups that together constitute the conformance test.

Chapter 4 and 5 give an overview and summary of the test results, the conclusion(s) and recommendations.

Annex A specifies the detailed test procedures and their outcome.

1.5 Glossary

DUT	Device Under Test
ICD	IED configuration description in SCL-format
MICS	Model Implementation Conformance Statement
PICS	Protocol Implementation Conformance Statement
TICS	Technical Issues Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SCD	System configuration description in SCL-format
SCL	System Configuration Language
SNTP	Simple Network Time Protocol
TISSUE	Technical issue
UCAIUG	UCA International Users Group.

2 REFERENCES

2.1 Normative

The tests defined in this document are based on the following IEC 61850 documents.

IEC 61850-4, *Communication networks and systems for power utility automation – Part 4: System and project management; Edition 2.0; 2011-04.*

IEC 61850-6, *Communication networks and systems for power utility automation – Part 6: Configuration description language for communication in electrical substations related to IEDs; Edition 2.0; 2009-12.*

IEC 61850-7-1, *Communication networks and systems for power utility automation – Part 7-1: Basic communication structure – Principles and models; Edition 2.0; 2011-07.*

IEC 61850-7-2, *Communication networks and systems for power utility automation – Part 7-2: Basic information and communication structure – Abstract communication service interface (ACSI); Edition 2.0; 2010-08.*

IEC 61850-7-3, *Communication networks and systems for power utility automation – Part 7-3: Basic communication structure – Common data classes; Edition 2.0; 2010-12.*

IEC 61850-7-4, *Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes; Edition 2.0; 2010-03.*

IEC 61850-8-1, *Communication networks and systems for power utility automation – Part 8-1: Specific communication service mapping (SCSM) – Mappings to MMS (ISO/IEC 9506-1 and ISO/IEC 9506-2) and to ISO/IEC 8802-3; Edition 2.0; 2011-06.*

IEC 61850-10, *Communication networks and systems for power utility automation – Part 10: Conformance testing; Edition 2.0; 2012-12.*

2.2 Other

IS 9646 – OSI – Conformance testing methodology and framework.

UCA International User Group: Conformance Test Procedures for Server Devices with IEC 61850-8-1 Edition 2 Interface Revision 1.0, April 2013.

UCA International User Group: Fast Track Test Procedures Change List (TPCL) version 1.1.1 for IEC 61850 Edition 2 server test procedures revision 1.0

UCA International User Group: Quality Assurance Program for IEC Device Implementation Testing and Test System Accreditation and Recognition, Version 2.0, 17 June, 2006.

UCA International User Group: Quality Assurance Program Addendum for IEC 61850 Specific Product Testing, Version 1.0, March 8, 2006.

<http://tissues.iec61850.com/>.

3 THE CONFORMANCE TEST

3.1 Components in the test environment

The test environment consists of the following components:

- DUT
- CLIENT SIMULATOR
- ANALYSER
- EQUIPMENT SIMULATOR
- Ethernet switch
- Time master

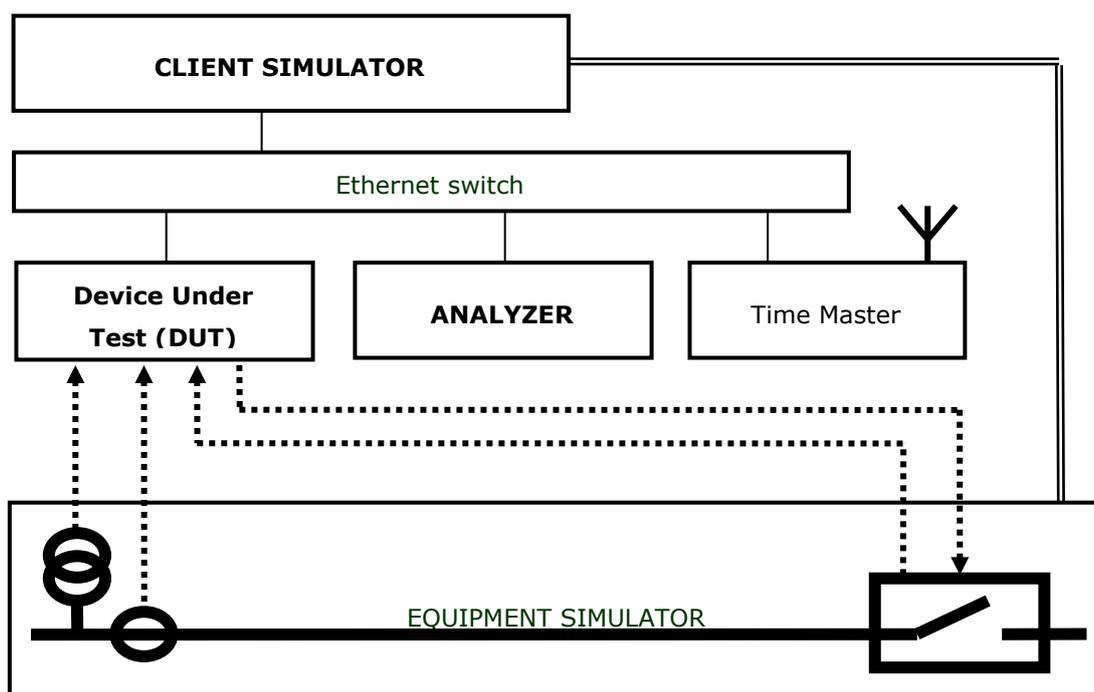


Figure 3.1 The server test environment

3.2 Overview of the test suite

The server test cases are structured as follows:

- Documentation and version control (IEC 61850-4)
- Configuration file (IEC 61850-6)
- Data model (IEC 61850-7-3 and IEC 61850-7-4)
- Mapping of ACSI models and services (IEC 61850-7-2 and IEC 61850-8-1)
 - Application association
 - Server & Logical Device & Logical Node & Data
 - Data set
 - Service tracking
 - Substitution
 - Setting group
 - Reporting
 - Logging
 - Generic object oriented substation events

- Control
- Time and time synchronization
- File transfer.

The *PICS* is used to select the applicable test procedures to be included in the test.

4 TEST RESULTS

Tables 4.1 and 4.2 in this Chapter give an overview of the conformance test results. References shown in the table columns refer to the individual test procedures in Annex A. The Mandatory column indicates the mandatory test cases and the Conditional column indicates the same for the conditional test cases. The Inconclusive column indicates those test cases that did not pass nor fail.

Table 4.1 Overview of applicable test cases passed for DUT

Conformance Block	Mandatory	Conditional
1: Basic Exchange	sAss1, sAss2, sAss3, sAssN2, sAssN3, sAssN4, sAssN5, sSrv1, sSrv2, sSrv3, sSrv4, sSrv5, sSrvN1abcd, sSrvN4	sSrv6, sSrv8, sSrv12, sSrvN1e, sSrvN1f, sSrvN3
2: Data Sets	sDs1, sDs10a, sDsN1ae	
4: Setting Group Selection	sSg1, sSg3, sSgN1	
4+: Setting Group Definition	sSg2, sSg4, sSg7, sSg8, sSg10, sSg12, sSgN2, sSgN3, sSgN4, sSgN5	sSg5
5: Unbuffered Reporting	sRp1, sRp2, sRp3, sRp4, sRp9, sRp14, sRpN1, sRpN2, sRpN3, sRpN4, sRpN8	sRp6, sRp7, sRp8, sRp10, sRp11, sRp12, sRp13, sRpN5
6: Buffered Reporting	sBr1, sBr2, sBr3, sBr4, sBr9, sBr14, sBr20, sBr21, sBr22, sBr25, sBr26, sBr27, sBr28, sBrN1, sBrN2, sBrN3, sBrN4, sBrN5, sBrN8	sBr6, sBr7, sBr8, sBr10, sBr11, sBr12, sBr13
9a: GOOSE publish	sGop2a, sGop3, sGop4, sGop7, sGop9, sGop10, sGop11	sGop1, sGop6, sGopN1
9b: GOOSE subscribe	sGos1, sGos2, sGos3, sGos5, sGos6a, sGos7, sGosN1, sGosN2, sGosN3, sGosN4, sGosN5, sGosN6	
12a: Direct control	sCtl5, sCtl10, sDOns1, sDOns2	
13: Time sync	sTm1, sTm2, sTmN1	sTm3
14: File transfer	sFt1, sFt2ab, sFt4, sFt5, sFtN1ab	

Table 4.2 Overview of applicable test cases failed, inconclusive or comments for DUT

Conformance Block	Inconclusive	Failed	Comment
12a: Direct control	sCtl5		

5 CONCLUSIONS AND RECOMMENDATIONS

Based on the test results described in this verification report, *TEST FACILITY* declares the tested IEC 61850 Edition 2 implementation in the *DUT* has **not been shown to be non-conforming** to IEC 61850 Edition 2 part 6, 7-1, 7-2, 7-3, 7-4 and 8-1 as specified in the PICS, MICS, PIXIT, TICS and ICD and configured according to the provided SCD.

5.1 Recommendations following from the test

The following comments and recommendations apply for the *DUT*:

- sRp8: the buffer time is not accurate. On configure time of 5 seconds the DUT used 6,5 seconds
- sCtI5: the test result is inconclusive because the only controllable object in the datamodel is Mod. And Mod shall be controllable independent of its value.

APPENDIX A

Detailed test procedures and results

A1 Documentation (IEC 61850-4)

Test case	Test case description	Verdict
sDoc1	Check if the major/minor software version in the PICS documentation and the DUT do match (IEC61850-4). PICS shall contain the ACSI conformance statement according to IEC 61850-7-2 Annex A	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sDoc2	Check if the major/minor software version in the PIXIT documentation and software version of the DUT does match (IEC61850-4). PIXIT shall indicate the required information as requested in the applicable test cases	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sDoc3	Check if the major/minor software version in the MICS documentation and software version of the DUT does match (IEC61850-4). MICS shall indicate the semantics of all non-standard Logical Nodes, Data Objects and enumerations	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sDoc4	Check if the major/minor software version in the TICS documentation and software version of the DUT does match (IEC61850-4). TICS shall indicate that the mandatory and applicable technical issues are implemented	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive

A2 Configuration file (IEC 61850-6)

Test case	Test case description	Verdict
sCnf1	Test if the ICD configuration file validates according to the SCL schema: version 2007, revision B	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf2	Check if the SCL configuration file used to configure the DUT corresponds with the actual data object references, data types, data sets and pre-configured data values (settings) exposed by the DUT on the network. When more data objects are exposed, attach a list and set the test result to Passed. When less data objects are exposed the test result is Failed. The format of the pre-configured values in SCL shall match IEC 61850-6 Table 45	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf3	Change at least 5 configurable parameters that are exposed by the DUT on the network in the SCD configuration file, configure the DUT using the SCD configuration file (using the supplied configuration tool) and check the updated configuration using online services corresponds with the updated SCD file. Restore the original SCD file and re-configure the DUT to its original state.	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf4	Check the ICD if the server capabilities in the IED "services" section(s) do correspond with the ACSI services specified in the PICS (compare TISSUE #901)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf5	In case the control model is fixed (PIXIT) check if the ICD correctly initializes the ctlModel values for all controllable objects	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf6	Check the SCL version = "2007", revision = "B" and nameLength = 64	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sCnf7	Check the "ldName" naming structure when supported. All online object references (including data sets, control block references and object references - CDC ORG) shall start with the "LDevice ldName" value instead of the "IED name" + "LDevice inst"	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive <input type="checkbox"/> Not applicable
sCnf8	When GOOSE subscription is supported and when SICS I43 is supported, check that the IED does subscribe to the data attributes as specified in the IID or SCD Inputs - ExtRef elements.	<input type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive <input checked="" type="checkbox"/> Not applicable
sCnf9	The BDA for SBOw, Oper and Cancel DAtype's and DA SBO shall be followed by a ProtNS element with type = 8-MMS and its contents = IEC61850-8-1:2003 or IEC61850-8-1:2007 (IEC 61850-8-1 Subclause 25.5, TISSUE #853)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive

A3 Data model (IEC 61850-7-3 and IEC 61850-7-4)

Test case	Test case description	Verdict
sMdl1	Verify presence of mandatory data objects for each LN type and data attributes for each DO type. Passed when all objects/attributes are present	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl2	Verify presence of conditional presence true data objects for each LN type and data attributes for each DO type. Passed when all objects/attributes are present	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl3	Verify non-presence of conditional presence false data objects for each LN type and data attributes for each DO type. Passed when these objects/attributes are not present	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl4	Verify data model mapping according to applicable SCSM concerning name length and object expansion. Passed when mapping is according to applicable SCSM	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl5	Verify data model mapping according to applicable SCSM concerning organisation of functional components.	Deprecated
sMdl6	Verify data model mapping according to applicable SCSM concerning naming of control blocks and logs. Passed when mapping is according to applicable SCSM. Compare detailed test procedure	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl7	Verify type of all data objects for each LN type and all data attributes for each DO type. Passed when type of all objects/attributes do match with the IEC 61850-7-3, IEC 61850-7-4 and the applicable SCSM	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl8	Verify that the preconfigured enumerated data attribute values from the device and SCL are in specified range. Passed when all values are in range	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl9	Check if manufacturer specific data model extensions are implemented according to the extension rules in IEC 61850-7-1 clause 14. Compare detailed test procedure	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl10	Check if the order of the data attributes with the same functional constraint of the DO type match with IEC 61850-7-3. Passed when all attributes are in matching order	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl11	Check if the name length of IED, Logical Devices, Logical Nodes, data objects, data attributes, data sets and control blocks do not exceed the maximum length as specified in IEC 61850-7-2 clause 22.2 and SCSM	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl12	Check that the rules for multiple data object instantiation are kept (IEC 61850-7-1 clause 14.6, IEC 61850-7-4).	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl13	Check if the logical device name space or the LLN0 logical node name space refers to Edition 2: IEC 61850-7-4:2007 or a newer revision of edition 2 (e.g. IEC 61850-7-4:2007B)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
sMdl14	Check the correct use of name spaces for non-substation power utility applications like for example Hydro and DER. Compare detailed test procedure	<input type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive <input checked="" type="checkbox"/> Not applicable

Detailed data modelling test procedures

sMdl6	Naming of control blocks and logs	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive																																								
IEC 61850-6 Subclause 9.3.8																																										
<p><u>Expected result</u></p> <ul style="list-style-type: none"> Report control blocks may be indexed. The indexing of report control blocks depends on the presence and value of the SCL elements: RptEnabled, max and indexed. According to the SCL schema the default value of indexed=TRUE and max = 1, max = 0 is not allowed. The indexing shall be according to the following table, SCL name="rcbA" <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>RCBName (IED)</th> <th>RptEnabled</th> <th>max=</th> <th>indexed</th> </tr> </thead> <tbody> <tr><td>rcbA01</td><td></td><td></td><td></td></tr> <tr><td>rcbA01</td><td></td><td></td><td>TRUE</td></tr> <tr><td>rcbA</td><td></td><td></td><td>FALSE</td></tr> <tr><td>rcbA01</td><td>y</td><td>1</td><td></td></tr> <tr><td>rcbA01</td><td>y</td><td>1</td><td>TRUE</td></tr> <tr><td>rcbA</td><td>y</td><td>1</td><td>FALSE</td></tr> <tr><td>rcbA01, rcbA02</td><td>y</td><td>2</td><td></td></tr> <tr><td>rcbA01, rcbA02</td><td>y</td><td>2</td><td>TRUE</td></tr> <tr><td>rcbA (only unbuffered)</td><td>y</td><td>2</td><td>FALSE</td></tr> </tbody> </table> <ul style="list-style-type: none"> The report control block attributes owner and resvTms do match with the SCL IED Services element owner and resvTms The setting group control block attribute resvTms does match with the SCL IED Services element SGEEdit resvTms The presence of the optional GOOSE control block attributes minTime, maxTime, fixedOffs have no SCL IED Services elements 			RCBName (IED)	RptEnabled	max=	indexed	rcbA01				rcbA01			TRUE	rcbA			FALSE	rcbA01	y	1		rcbA01	y	1	TRUE	rcbA	y	1	FALSE	rcbA01, rcbA02	y	2		rcbA01, rcbA02	y	2	TRUE	rcbA (only unbuffered)	y	2	FALSE
RCBName (IED)	RptEnabled	max=	indexed																																							
rcbA01																																										
rcbA01			TRUE																																							
rcbA			FALSE																																							
rcbA01	y	1																																								
rcbA01	y	1	TRUE																																							
rcbA	y	1	FALSE																																							
rcbA01, rcbA02	y	2																																								
rcbA01, rcbA02	y	2	TRUE																																							
rcbA (only unbuffered)	y	2	FALSE																																							
<p><u>Test description</u></p> <p>Verify the naming and attributes of all control blocks and logs in the DUT.</p>																																										
<p><u>Comment</u></p>																																										

sMdl9	Data model extensions	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-1 Subclause 13.4.5, 14 TISSUE #828, #1196		
<p><u>Expected result</u></p> <ul style="list-style-type: none"> Private LN shall have lnNs referring to a non-standard name space Private DO (not defined in the LN) in a standardized LN shall have a dataNs referring to a non-standard name space Standardized LN may re-use DO's from another standard LN. The DO may have a dataNs = IEC 61850-7-4:2007[A] or IEC 61850-7-4:2003 Private DO in a private LN may have a dataNs referring to a non-standard name space Standardized DO in a private LN shall have a dataNs = IEC 61850-7-4:2007[A] or IEC 61850-7-4:2003 Private CDC are not allowed, private extensions in existing CDC are not allowed Private data attributes are not allowed Private ENUM values in a standardized ENUM type shall have a negative ord value Private ENUM types are only allowed for private DO Extensions to control blocks are not allowed Only standardized data types are allowed 		
<p><u>Test description</u></p> <p>Scan SCL file for extensions: private LN, private DO, private DA and private ENUMs. Browse DUT for extensions: control blocks</p>		



Comment

TISSUE #1196 is not final yet however it is allowed that standard DO may be re-used in standard LN

TISSUE #1196: A standardized LN can either be extended by a new data object that must then contain the dataNs attribute or by standardized data objects in which case, I agree, the 7-1 rule should be enhanced.

A4 Mapping of ACSI models and services (IEC 61850-7-2 and applicable SCSM)

- A4.1 Application association
- A4.2 Server & Logical Device & Logical Node & Data
- A4.3 Data set
- A4.4 Service tracking
- A4.5 Substitution
- A4.6 Setting group
- A4.7 Unbuffered Reporting
- A4.8 Buffered Reporting
- A4.9 Logging
- A4.10 Generic object oriented substation events (GOOSE)
- A4.11 Control
- A4.12 Time and time synchronization
- A4.13 File transfer

The following table specifies which ACSI services are mandatory / optional for each conformance block.

Table A.4.1: ACSI services per conformance block

Conformance Block	Mandatory	Optional
1: Basic Exchange	Associate, Abort, Release GetServerDirectory(LD) GetLogicalDeviceDirectory GetLogicalNodeDirectory (DATA) GetDataValues GetDataDirectory/GetDataDefinition	GetAllDataValues SetDataValues
2: Data Set	GetLogicalNodeDirectory (DATA-SET) GetDataSetValues GetDataSetDirectory	SetDataSetValues
2+: Data Set Definition	CreateDataSet DeleteDataSet	
3: Substitution	SetDataValues GetDataValues	
4: Setting Group Selection	SelectActiveSG GetSGCBValues	
4+: Setting Group Definition	SelectEditSG GetEditSGValue SetEditSGValue ConfirmEditSGValues	
5: Unbuffered Reporting	Report GetURCBValues SetURCBValues	
6: Buffered Reporting	Report GetBRCBValues SetBRCBValues	

7: Logging	GetLCBValues GetLogicalNodeDirectory (LOG) QueryLogByTime or QueryLogAfter GetLogStatusValues	SetLCBValues
9a: GOOSE publish	SendGOOSEMessage (publish)	GetGoCBValues SetGoCBValues
9b: GOOSE subscribe	SendGOOSEMessage (subscribe)	
9c: GOOSE management	GetGoReference GetGOOSEElementNumber	
12a: Direct control	Operate	TimeActivatedOperate
12b: SBO control	Select, Cancel, Operate	TimeActivatedOperate
12c: Enhanced Direct Control	Operate CommandTermination	TimeActivatedOperate
12d: Enhanced SBO control	SelectWithValue, Cancel, Operate CommandTermination	TimeActivatedOperate
13: Time sync	TimeSynchronization	
14: File transfer	GetServerDirectory(FILE) GetFile GetFileAttributeValues	SetFile DeleteFile
15: Service Tracking	<no specific services>	<no specific services>

The following table specifies which test procedures are mandatory/conditional for each conformance block (defined in Quality Assurance Plan Addendum for IEC 61850). Conditions refer to the SCL, PICS, MICS or PIXIT.

Table A.4.2: Test procedures per conformance block

Conformance Block	Mandatory	Conditional
1: Basic Exchange	sAss1, sAss2, sAss3, sAssN2, sAssN3, sAssN4, sAssN5 sSrv1, sSrv2, sSrv3, sSrv4, sSrv5, sSrvN1abcd, sSrvN4	sAssN6 Semantics: sSrv9, sSrv10 PICS-GetAllDataValues: sSrv8, sSrvN1f PICS-SetDataValues: sSrv6, sSrvN1e, sSrvN2, sSrvN3 SCL-Enum with FC=CF/DC/SP and valKind=Set: sSrvN2 SCL-blkEna: sSrv11 SCL-Mode off/blocked/test: sSrv12 SCL-GrRef: sSrv13
2: Data Sets	sDs1, sDs10a, sDsN1ae	PICS-DataSetValues: sDs10b, sDsN1b, sDsN13 SCL-configurable datasets: sDs15

2+: Data Set Definition	sDs2, sDs3, sDs4, sDs5, sDs6, sDs7, sDs8, sDs9, sDs11, sDs12, sDs13, sDs14, sDsN1cd sDsN2, sDsN3, sDsN4, sDsN5 sDsN6, sDsN7, sDsN8, sDsN8, sDsN9, sDsN10,	PICS-Report: sDsN11, sDsN12
3: Substitution	sSub1, sSub2, sSub3	
4: Setting Group Selection	sSg1, sSg3, sSgN1	SCL-numOfSg>1 or PICS-SGediting: sSg11
4+: Setting Group Definition	sSg2, sSg4. sSg7, sSg8, sSg10, sSgN2, sSgN3, sSgN4, sSgN5	SCL-ResvTms: sSg5, sSg6 SCL-NumOfSg>1: sSg9
5: Unbuffered Reporting	sRp1, sRp2, sRp3, sRp4, sRp9, sRp14, sRpN1, sRpN2, sRpN3, sRpN4, sRpN8	PIXIT-Segmentation: sRp5 SCL-DatSet=dyn: sRp6, sRp7 SCL-DatSet=conf/dyn: sRp10 SCL-BufTm=conf/dyn: sRp8, sRp11, sRp12 SCL-Owner: sRp13 SCL-URCB visible to all clients: sRpN5
6: Buffered Reporting	sBr1, sBr2, sBr3, sBr4, sBr9, sBr14, sBr20, sBr21, sBr22, sBr25. sBr26, sBr27, sBr28 sBrN1, sBrN2, sBrN3, sBrN4, sBrN5, sBrN8	PIXIT-Segmentation: sBr5 SCL-DatSet=dyn: sBr6, sBr7 SCL-DatSet=conf/dyn: sBr10 SCL-BufTm=conf/dyn: sBr8, sBr11, sBr12 SCL-Owner: sBr13 SCL-ResvTms: sBr23, sBr24
7: Logging	sLog2, sLog3, sLog4, sLog5, sLog6, sLog9, sLog11, sLog12, sLogN1, sLogN2	PICS-QueryLogByTime: sLog7 PICS-QueryLogAfter: sLog8 MICS-GLOG: sLog10
9a: GOOSE publish	sGop2, sGop3, sGop4, sGop7, sGop9, sGop10, sGop11	PICS-GetGoCBValues: sGop1 SCL-Fixed offset: sGop2b PIXIT-Simulation: sGop5 PICS-SetGoCBValues: sGop6, sGopN1 PIXIT-non test equipment: sGop7 PIXIT-Dataset to large: sGopN2
9b: GOOSE subscribe	sGos1, sGos2, sGos3, sGos5, sGos6a, sGos7, sGosN1, sGosN2, sGosN3, sGosN4, sGosN5, sGosN6	MICS-LGOS: sGos4 PIXIT-Simulation: sGos6b
9c: GOOSE management	sGom1, sGom2, sGomN1	

12: Control general	sCtl5, sCtl8, sCtl9, sCtl10, sCtl11, sCtl14, sCtl25	SCL-Writable control model: sCtl2 PICS-TimOper: sCtl3 MICS-stSeld: sCtl4 SCL-multiple SBO: sCtl6 SCL-CILO: sCtl7 SCL-Select on DO: sCtl13 PIXIT-Mode off/blocked: sCtl15 SCL-Loc: sCtl16 SCL-LocSta: sCtl17 SCL-CmdBlk: sCtl18 SCL-blkEna: sCtl19 PIXIT-AddCause: <ul style="list-style-type: none"> • Parameter-change-in-execution: sCtl20 • Step-limit: sCtl21 • Ended-with-overshoot: sCtl23 • Abortion-due-to-deviation: sCtl24 • Command-already-in-execution: sCtl26 SCL-SBO and SBOw: sCtl27
12a Direct control	sDOns1, sDOns2	PICS-TimOper: sDOns4, sDOns5
12b SBO control	sSBOns1, sSBOns2, sSBOns6	PICS-TimOper: sSBOns4, sSBOns5 PIXIT-Operate-Many: sSBOns7
12c Enhanced Direct Control	sDOes1, sDOes2	PICS-TimOper: sDOes4, sDOes5
12d Enhanced SBO control	sSBOes1, sSBOes2, sSBOes6, sSBOes8	PICS-TimOper: sSBOes4, sSBOes5 PIXIT-Operate-Many: sSBOes7
13: Time sync	sTm1, sTm2, sTmN1	PIXIT-COMTRADE: sTm3 SCL-LTIM: sTm4 SCL-LTMS: sTm5 PIXIT-ClockFailure: sTmN2
14: File transfer	sFt1, sFt2ab, sFt4, sFt5, sFtN1ab	PICS-SetFile: sFt3 PICS-DeleteFile: sFt2c, sFtN1c
15: Service tracking		SCL-BrcbTrk: sTrk1 SCL-UrcbTrk: sTrk2 SCL -LocbTrk: sTrk3 SCL -GocbTrk: sTrk4 SCL -MsvcbTrk: sTrk5 SCL -UsvcbTrk: sTrk6 SCL -SgcbTrk: sTrk7 SCL -SpcTrk: sTrk8 SCL -DpcTrk: sTrk9 SCL -IncTrk: sTrk10 SCL -EncTrk: sTrk11 SCL -IscTrk: sTrk12 SCL -BscTrk: sTrk13 SCL -ApcFTrk: sTrk14 SCL -ApcITrk: sTrk15 SCL -BacTrk: sTrk16 SCL -GenTrk: sTrk17

Note that sAssN1, sSrv7, sCtl12, sCtl22, sRpN6, sRpN7, sBrN6, sBrN7, sLog1, sGop8, sDOns3, sSBOns3, sDOes3 and sSBOes3 are not applicable for IEC 61850-8-1 and not referenced in this table.

The following paragraphs describe the abstract test cases and corresponding detailed test procedures.

A4.1 Application association

Abstract test cases

Test case	Test case description
sAss1	Associate and client-release a TPAA association (IEC 61850-7-2 Subclause 8.3.2)
sAss2	Associate and client-abort TPAA association (IEC 61850-7-2 Subclause 8.3.2)
sAss3	Associate with maximum number of clients simultaneously (PIXIT)

Test case	Test case description
sAssN1	Check that with incorrect authentication parameters and authentication turned on at server the association fails, and with authentication turned off the server associates (IEC 61850-7-2 Subclause 8.3)
sAssN2	Check that with incorrect association parameters at server or client the association fails (IEC 61850-7-2 Subclause 8.3, PIXIT)
sAssN3	Set up maximum+1 associations, verify the last associate is refused
sAssN4	Disconnect the communication interface, the DUT shall detect association lost within a specified period
sAssN5	Interrupt and restore the power supply, the DUT shall accept an association request when ready
sAssN6	Verify the re-use of dropped association resources

Detailed test procedures

sAss1	Associate and client-release a TPAA association	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2		
<u>Expected result</u> 2. DUT sends Associate response+ 3. DUT sends Release response+		
<u>Test description</u> 1. Configure the Client and DUT with the correct association and authentication parameters 2. Client request Associate 3. Client request Release 4. Repeat step 2 and 3 250 times		
<u>Comment</u>		

sAss2	Associate and client-abort TPAA association	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2		
<u>Expected result</u> 2. DUT sends Associate response+ 3. DUT sends Abort response+		

<u>Test description</u> 1. Configure the Client and DUT with the correct association and authentication parameters 2. Client requests Associate 3. Client requests Abort 4. Repeat step 2 and 3 250 times
<u>Comment</u>

sAss3	Associate with maximum number of clients simultaneously	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2		
<u>Expected result</u> 2. DUT sends Associate response+ for each client 3. DUT sends Release response+ for each client		
<u>Test description</u> 1. Configure the Client and DUT with the correct association and authentication parameters 2. Client 1 to max requests Associate 3. Client 1 to max requests Release 4. Repeat step 2 and 3 250 times		
<u>Comment</u>		

sAssN2	Associate with incorrect association parameters	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2, PIXIT: As5, As6		
<u>Expected result</u> 1. DUT sends Associate response+ 2. DUT sends Release response+ 4. DUT sends Associate response- when PIXIT indicates the DUT verifies the parameter, otherwise the dUT sends Associate response+		
<u>Test description</u> 1. Configure the Client and DUT with correct association and authentication parameters and request Associate 2. Client requests Release 3. Configure the Client and DUT with correct authentication parameters and one of the following incorrect configurable association parameters: <ul style="list-style-type: none"> • called / calling transport selector • called / calling session selector • called / calling presentation selector • called / calling AP title • called / calling AE qualifier 4. Client requests Associate 5. When DUT sends Associate response+, Client sends Release request 6. Repeat step 1 to 5 for the next association parameter till all parameters are verified		
<u>Comment</u> The following table indicates the associate response results with incorrect: <ul style="list-style-type: none"> • called / calling transport selector - / + • called / calling session selector - / + • called / calling presentation selector - / + • called / calling AP title + / + • called / calling AE qualifier + / + "- " = associate failed, DUT does check the incorrect parameter and sends response- "+ " = associate succeeded, DUT does not check the incorrect parameter and sends response+		

sAssN3	Associate with maximum+1 number of clients simultaneously	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2		
<u>Expected result</u>		
2. DUT sends Associate response+ for at least the maximum server associates as defined in the PIXIT and response- for the last associate 3. DUT sends Release response+		
<u>Test description</u>		
1. Configure the Client and DUT with the correct association and authentication parameters 2. Client 1 to N send Associate requests until the DUT sends response- 3. Client 1 to N-1 send release 4. Repeat step 2 and 3 250 times		
<u>Comment</u>		

sAssN4	Detection of lost link	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2, PIXIT: As2, As3		
<u>Expected result</u>		
2. DUT sends Associate response+ 3. DUT sends GetDataValues response+ 4. DUT sends KEEP ALIVE messages according to PIXIT specified interval 7. DUT sends no response		
<u>Test description</u>		
1. Configure the Client and DUT with the correct association and authentication parameters 2. Client requests Associate 3. Client requests a correct GetDataValues 4. Wait multiple KEEP ALIVE timeouts 5. Disable TCP communication between the Client and the DUT. E.g. disconnect the physical link, between two Ethernet switches (preventing Ethernet hardware error detection at both client and server), some seconds longer than the KEEP ALIVE timeout specified in the PIXIT 6. Enable TCP communication. E.g. connect the physical link 7. Verify the DUT has lost the association by sending a correct GetDataValues request		
<u>Comment</u>		

sAssN5	Power supply interrupt	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 8.3.2 IEC 61850-8-1 Subclause 10.2, PIXIT: As8		
<u>Expected result</u>		
2. DUT sends Associate response+ 4. The DUT sends Associate response+ within the specified power-up time (PIXIT)		
<u>Test description</u>		
1. Configure the Client and DUT with the correct association and authentication parameters 2. Client requests Associate 3. Power down and wait until DUT is off. Restore the DUT power supply and wait the specified power-up time (PIXIT) or until the DUT is initialised 4. Client requests Associate		



Comment

A4.2 Server & Logical Device & Logical Node & Data

Abstract test cases

Test case	Test case description
sSrv1	Request GetServerDirectory(LOGICAL-DEVICE) and check response (IEC 61850-7-2 Subclause 7.2.2)
sSrv2	For each GetServerDirectory(LOGICAL-DEVICE) response issue a GetLogicalDeviceDirectory request and check response (IEC 61850-7-2 Subclause 9.2.1)
sSrv3	For each GetLogicalDeviceDirectory response issue a GetLogicalNodeDirectory(DATA) request and check response (IEC 61850-7-2 Subclause 10.2.2)
sSrv4	For each GetLogicalNodeDirectory(DATA) response issue a GetDataDirectory request and check response (IEC 61850-7-2 Subclause 11.4.4) GetDataDefinition request and check response (IEC 61850-7-2 Subclause 11.4.5) GetDataValues request and check response (IEC 61850-7-2 Subclause 11.4.2)
sSrv5	Issue one GetDataValues request with different data reference hierarchy
sSrv6	For each write enabled DATA object issue a SetDataValues request and check response (IEC 61850-7-2 Subclause 11.4.3)
sSrv7	Issue one SetDataValues request with the maximum number of data values and check response. (Deprecated, this is not a valid SetDataValues request)
sSrv8	Request GetAllDataValues for each functional constraint and check response (IEC 61850-7-2 Subclause 10.2.3)
sSrv9	Evaluate the semantic of selected (volt/amp) analogue measurements: Verify analogue value (plausibility check, not accuracy) Verify quality bits, force situations to set specific quality bits Verify (UTC) timestamp value and quality (plausibility check, not accuracy) Verify scaling, range and units, change a setting and verify resulting value Verify dead band, change dead band and verify result Verify limit indications
sSrv10	Evaluate the semantic of selected status points: Verify status value Verify quality bits, force situations to set specific quality bits Verify (UTC) timestamp value and quality (plausibility check, not accuracy)
sSrv11	Verify that when blkEna is set to true by an operator the quality bit oldData and operatorBlocked is set by the server and the process data is not updated anymore (IEC 61850-7-3 Subclause 6.2.6)
sSrv12	Verify Mod/Beh values: off, test, blocked When Mod/Beh is off process data is not updated, Mod and Beh are updated, quality is set to invalid When Mod/Beh is test or test-blocked the process data quality test is set When Mod/Beh is on-blocked the process data quality is valid (IEC 61850-7-4 Annex A, TISSUE #712)
sSrv13	Verify logical device hierarchy; the LLN0.GrRef shall reference a valid logical device the reference shall not result in a hierarchy loop Beh value at higher level influences the lower levels correctly (i.e. like LD Beh influences LN behaviour dependent on LN Mod)

Test case	Test case description
sSrvN1	Request following data services with wrong parameters (unknown object, name case mismatch, wrong logical device or wrong logical node) and verify response- service error GetServerDirectory(LOGICAL-DEVICE) (IEC 61850-7-2 Subclause 7.2.2) GetLogicalDeviceDirectory (IEC 61850-7-2 Subclause 9.2.1) GetLogicalNodeDirectory(DATA) (IEC 61850-7-2 Subclause 10.2.2) GetAllDataValues (IEC 61850-7-2 Subclause 10.2.3) GetDataValues (IEC 61850-7-2 Subclause 11.4.2) SetDataValues (IEC 61850-7-2 Subclause 11.4.3) GetDataDirectory (IEC 61850-7-2 Subclause 11.4.4) GetDataDefinition (IEC 61850-7-2 Subclause 11.4.5)
sSrvN2	Request SetDataValues of ENUMERATED data with out-of-range value and verify response- service error (IEC 61850-7-2 Subclause 11.4.3)
sSrvN3	Request SetDataValues with mismatching data type (e.g. int-float) and verify response- service error (IEC 61850-7-2 Subclause 11.4.3)
sSrvN4	Request SetDataValues for read-only data values and verify response- service error (IEC 61850-7-2 Subclause 11.4.3)

Detailed test procedures

sSrv1	GetServerDirectory(LOGICAL-DEVICE)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 7.2.2 IEC 61850-8-1 Subclause 9.3		
<u>Expected result</u>		
1. DUT sends Association response+ 2. DUT sends GetServerDirectory(LOGICAL-DEVICE) response+ with a list of logical devices		
<u>Test description</u>		
1. Client requests correct Association 2. Client requests GetServerDirectory(LOGICAL-DEVICE) 3. Continue with sSrv2		
<u>Comment</u>		

sSrv2	GetLogicalDeviceDirectory	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 9.2.1 IEC 61850-8-1 Subclause 11.1		
<u>Expected result</u>		
1. DUT sends GetLogicalDeviceDirectory response+ with a list of logical nodes within the logical device		
<u>Test description</u>		
1. For each responded logical device Client requests GetLogicalDeviceDirectory 2. Continue with sSrv3		
<u>Comment</u>		

sSrv3	GetLogicalNodeDirectory(DATA)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------	-------------------------------	--

IEC 61850-7-2 Subclause 9.2.2
IEC 61850-8-1 Subclause 12.3.1

Expected result

1. DUT sends GetLogicalNodeDirectory(DATA) response+ with a list of data

Test description

1. For each responded logical node directory Client requests GetLogicalNodeDirectory(DATA)
2. Continue with sSrv4

Comment

sSrv4	GetDataDirectory, GetDataDefinition and GetDataValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	--	--

IEC 61850-7-2 Subclause 11.4.4, 11.4.5 and 11.4.2
IEC 61850-8-1 Subclause 13.4.3, 13.4.4 and 13.4.1

Expected result

1.
 - a) DUT sends GetDataDirectory response+
 - b) DUT sends GetDataDefinition response+
 - c) DUT sends GetDataValues response+

Test description

1. For each responded data object Client requests a:
 - a) GetDataDirectory
 - b) GetDataDefinition
 - c) GetDataValues

Comment

sSrv5	GetDataValues with data hierarchy	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	--	--

IEC 61850-7-2 Subclause 11.4.2
IEC 61850-8-1 Subclause 13.2.1

Expected result

1. DUT sends GetDataValues response+ with requested data hierarchy

Test description

1. Client requests one GetDataValues of at least the following data objects for the supported data hierarchy level:
 - Functional constrained data: LLN0\$ST\$Mod
 - Functional constrained data attribute: LLN0\$ST\$Mod\$stVal
 - Functional constrained data attribute type attribute

Comment

sSrv6	SetDataValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	----------------------	--

IEC 61850-7-2 Subclause 11.4.3
IEC 61850-8-1 Subclause 13.2.2

Expected result

1. DUT sends SetDataValues response- with data access error "object-access-denied"
2. DUT sends SetDataValues(FC=BL, CF,SP, DC) response- for read-only data and response+ for write enabled data as specified in the ICD using valKind="RO" for read-only and "Set" for write enabled data attributes.
3. DUT sends SetDataValues response+
4. DUT sends GetDataValues response+ with requested value, the value does match
5. DUT sends SetDataValues response+
6. DUT sends GetDataValues response+ with requested value, the value does match

Test description

1. For each data object with FC=ST, MX or EX client sends a SetDataValues request with the current value
2. For each data object with FC=BL, CF, SP or DC client sends a SetDataValues request with the current value

For each type of write-enabled data objects

3. Client sends a SetDataValues with a valid new value
4. Client sends a GetDataValues request and check the value does match
5. Client sends a SetDataValues with the original value
6. Client sends a GetDataValues request and check the value does match

Comment

sSrv8

GetAllDataValues

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 10.2.3
IEC 61850-8-1 Subclause 12.3.2

Expected result

1. DUT sends GetAllDataValues response+
2. DUT sends GetAllDataValues response+

Test description

1. For each Logical Node and supported functional constraint the Client sends a GetAllDataValues request using MMS Alternate Access where the alternate access contains at least an allowed Data FC = ST, MX, CF, SP, DC, EX, BL, OR.
2. For each Logical node the Client sends a GetAllDataValues request using object reference <IED><LD>/<LN>\${FC} where FC = ST, MX, CF, SP, DC, EX, BL, OR.

Comment

sSrv12

Mode / Behaviour: off, test and/or blocked

- Passed
 Failed
 Inconclusive

IEC 61850-7-4 Table 10, Annex A
IEC 61850-8-1 Subclause 13.4.1, 13.4.2
TISSUE #712

Expected result

2. Mode and behaviour values are updated, quality of process data is invalid
4. Mode and behaviour values are updated, quality bit "test" is set in process data
6. Mode and behaviour values are updated, quality bit "test" is set in process data
8. Mode and behaviour values are updated, quality is the same as in Mode = On (TISSUE #712)
10. Mode and behaviour values are updated, all quality bits are cleared in process data

Test description

1. Force DUT into Mode = Off for one logical node (when supported)
2. Client requests GetDataValues of the Mode, Behaviour and process data
3. Force DUT into Mode = Test for one logical node (when supported)
4. Client requests GetDataValues of the Mode, Behaviour and process data
5. Force DUT into Mode = Test-blocked for one logical node (when supported)
6. Client requests GetDataValues of the Mode, Behaviour and process data
7. Force DUT into Mode = blocked for one logical node (when supported)
8. Client requests GetDataValues of the Mode, Behaviour and process data
9. Force DUT into Mode = On for one logical node
10. Client requests GetDataValues of the Mode, Behaviour and process data

Comment

sSrvN1

LD/LN/Data services with incorrect parameters

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 7.2.2, 8.2.1, 10.2-3, 11.4.2-5
IEC 61850-8-1 Subclause 8.1.3.4

Expected result

1.
 - a) DUT sends MMS service error with error class access "object-non-existent"
 - b) DUT sends MMS service error with error class access "object-non-existent"
 - c) DUT sends MMS service error with error class access "object-non-existent"
 - d) DUT sends response with data access error "object-non-existent"
 - e) DUT sends response with data access error "object-non-existent"
 - f) DUT sends response with data access error "object-non-existent"

Test description

1. Client requests the following data services with wrong parameters (unknown object, logical device and/or logical node, known object but with a name case mismatch when applicable):
 - a) GetLogicalDeviceDirectory
 - b) GetLogicalNodeDirectory(DATA)
 - c) GetDataDirectory / GetDataDefinition (same for part 8-1)
 - d) GetDataValues
 - e) SetDataValues
 - f) GetAllDataValues

Comment

sSrvN3

SetDataValues with mismatching data type

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 11.4.3
IEC 61850-8-1 Subclause 8.1.3.4.4.2, Table 23

Expected result

1. DUT sends response with data access error "type-inconsistent"
2. DUT sends response with data access error "type-inconsistent"
3. DUT sends response with data access error "type-inconsistent"
4. DUT sends response with data access error "type-inconsistent"

Test description

1. Client sends a SetDataValues request with an integer data object with a float value
2. Client sends a SetDataValues request with a float data object with an integer value
3. Client sends a SetDataValues request with a boolean data object with a float value
4. Client sends a SetDataValues request with a bitstring data object with a float value

Comment

sSrvN4	SetDataValues of read-only FCDA	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 11.4.3 IEC 61850-8-1 Subclause 8.1.3.4.4.2, Table 23		
<u>Expected result</u> 1. DUT sends response with data access error "object-access-denied"		
<u>Test description</u> 1. Client sends a SetDataValues request with an read-only FCDA		
<u>Comment</u>		

A4.3 Data set

Abstract test cases

Test case	Test case description
sDs1	Request GetLogicalNodeDirectory(DATA-SET) and check response (IEC 61850-7-2 Subclause 10.2.2) For each response issue a GetDataSetValues request and check response (IEC 61850-7-2 Subclause 13.3.2) GetDataSetDirectory request and check response (IEC 61850-7-2 Subclause 13.3.6)
sDs2	Request a persistent CreateDataSet with one member and with maximum possible members and check response (IEC 61850-7-2 Subclause 13.3.4) and verify that the persistent data set is visible for another client
sDs3	Request a non-persistent CreateDataSet with one, maximum members and check response (IEC 61850-7-2 Subclause 13.3.4) and verify that the persistent data set is not visible for another client
sDs4	Create and delete a persistent dataset, create the dataset again with the same name with one extra data value / re-ordered member and check the members
sDs5	Create and delete a non-persistent dataset, create the dataset again with the same name with one extra data value / re-ordered member and check the members
sDs6	Create a non-persistent dataset, release/abort the association, associate again and check the dataset has been deleted (IEC 61850-7-2 Subclause 13.1)
sDs7	Create a persistent dataset, release/abort the association, associate again and check the dataset is still present (IEC 61850-7-2 Subclause 13.1)
sDs8	Create and delete a persistent data set several times and verify every data set can be created normally
sDs9	Create and delete a non-persistent data set several times and verify every data set can be created normally
sDs10	Verify SetDataSetValues / GetDataSetValues with GetDataValues and SetDataValues
sDs11	Verify that the maximum number of persistent data sets with the maximum number of members can be created as specified in SCL
sDs12	Verify that the maximum number of non-persistent data sets with the maximum number of members can be created as specified in SCL
sDs13	Verify that a persistent data set can be created with the maximum name length for data set and a data set member (IEC 61850-7-2 Subclause 22.2)
sDs14	Verify that a non-persistent data set can be created with the maximum name length for data set and a data set member (IEC 61850-7-2 Subclause 22.2)
sDs15	Verify that the DUT supports data sets containing elements with different data hierarchy levels

Test case	Test case description
sDsN1	Request following data set services with wrong parameters (unknown object, name case mismatch, wrong logical device or wrong logical node) and verify response- service error: GetDataSetValues (IEC 61850-7-2 Subclause 13.3.2) SetDataSetValues (IEC 61850-7-2 Subclause 13.3.3) CreateDataSet (IEC 61850-7-2 Subclause 13.3.4) DeleteDataSet (IEC 61850-7-2 Subclause 13.3.5) GetDataSetDirectory (IEC 61850-7-2 Subclause 13.3.6)
sDsN2	Create a persistent dataset with the same name twice, and verify response- service error
sDsN3	Create a non-persistent dataset with the same name twice, and verify response- service error
sDsN4	Continue to create persistent data sets until a correct response- service error is returned

Test case	Test case description
sDsN5	Continue to create non-persistent data sets until a correct response- service error is returned
sDsN6	Create a persistent dataset with unknown member verify response- service error
sDsN7	Create a non-persistent dataset with unknown member verify response- service error
sDsN8	Delete a (pre-defined) non-deletable dataset, and verify response- service error
sDsN9	Delete a persistent dataset twice, and verify response- service error
sDsN10	Delete a non-persistent dataset twice, and verify response- service error
sDsN11	Delete a persistent dataset referenced by a (report) control class, and verify response- service error (IEC 61850-7-2 Subclause 13.1)
sDsN12	Delete a non-persistent dataset referenced by a (report) control class, and verify response- service error (IEC 61850-7-2 Subclause 13.1)
sDsN13	Request SetDataSetValues with a dataset with one or more read-only members, and verify response- service error

Detailed test procedures

sDs1	GetLogicalNodeDirectory, GetDataSetDirectory, GetDataSetValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 10.2.2, 13.3.2, 13.3.6 IEC 61850-8-1 Subclause 14.3		
<u>Expected result</u>		
1. DUT sends a GetLogicalNodeDirectory (DATA-SET) response+ 2. DUT sends a GetDataSetDirectory response+ 3. DUT sends a GetDataSetValues response+		
<u>Test description</u>		
1. For each logical node Client requests a GetLogicalNodeDirectory (DATA-SET) 2. For each returned data set, Client requests a GetDataSetDirectory 3. For each returned data set, Client requests a GetDataSetValues		
<u>Comment</u>		

sDs10	GetDataSetValues, SetDataSetValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 13.3.2, 13.3.3 IEC 61850-8-1 Subclause 12.3.1, 14.3.1, 14.3.3, 14.3.4		
<u>Expected result</u>		
a) The DUT returns the corresponding values for GetDataSetValues and GetDataValues b) Before the SetDataSetValues: The values returned by GetDataSetValues and GetDataValues correspond After the SetDataSetValues: The values returned by GetDataSetValues and GetDataValues correspond and contain the new values as set with SetDataSetValues and SetDataValues. Every service request results in a corresponding response+		

Test description

Select or create a data set with read-only elements
Client requests a GetDataSetValues
Client requests a GetDataValues for each member of the dataset.
b) Select or create a data set with writable elements
Client requests a GetDataSetValues
Client requests a GetDataValues for each member of the dataset.
Client requests a SetDataSetValues with different values than received by GetDataValues
Client requests a GetDataSetValues
Client requests a SetDataValues for each member of the dataset with different values than received by
GetDataSetValues
Client request GetDataSetValues

Comment

Part a) is applicable

sDs15	Dataset with most to least data hierarchy FCDA elements	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 10.2.2, 13.3.2, 13.3.6 IEC 61850-8-1 Subclause 14.3 TISSUE #1174		
<u>Expected result</u> 1. In the SCL file the FCDA doName contains maximum one dot (for example doName="neut.phsA" and daName="cVal.mag.f") 2. DUT sends a GetDataSetDirectory response+ 3. DUT sends a GetDataSetValues response+		
<u>Test description</u> 1. Configure DUT with one or more datasets with the least detailed data hierarchy to the most detailed data hierarchy available in the DUT data model. For example: <ul style="list-style-type: none">• MMXU.V• MMXU.A.phsA• MMXU.A.phsB.cVal• MMXU.A.phsC.cVal.mag• MMXU.A.neut.cVal.mag.f 2. Client requests a GetDataSetDirectory for these datasets 3. Client requests a GetDataSetValues for these datasets		
<u>Comment</u>		

sDsN1	DataSet services with illegal parameters	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 13.3.2, 13.3.3, 13.3.4, 13.3.5, 13.3.6 IEC 61850-8-1 Subclause 8.1.3.4		
<u>Expected result</u> a) DUT sends ServiceError with errorClass=access errorCode=object-non-existent b) DUT sends ServiceError with errorClass=access errorCode=object-non-existent c) DUT sends ServiceError with errorClass=access errorCode=object-non-existent d) DUT sends DeleteDataSet response+ with numberMatched=0, numberDeleted=0 e) DUT sends ServiceError with errorClass=access errorCode=object-non-existent		

Test description

- a)
1. Client requests a GetDataSetValues with an unknown data set name as DataSetReference.
 2. Client requests a GetDataSetValues for a known data set but with the first character of the DataSetReference in opposite case. E.g. if the first character is 'M', use 'm' now. If it was 'm', use 'M'.
 3. Client requests a GetDataSetValues with a non-existing Logical Device in the DataSetReference
 4. Client requests a GetDataSetValues where the Logical Device in the DataSet reference is replaced by another, existing Logical Device in this DUT, but which does not contain a dataset with the same name
 5. Client requests a GetDataSetValues with a non-existing Logical Node in the DataSetReference
 6. Client requests a GetDataSetValues where the Logical Node in the DataSet reference is replaced by another, existing Logical Node in another Logical Device in the DUT
- b) Repeat steps 1 to 6 for SetDataSetValues
c) Repeat steps 1 to 6 for CreateDataSet
d) Repeat steps 1 to 6 for DeleteDataSet
e) Repeat steps 1 to 6 for GetDataSetDirectory

Comment

Steps 4 and 6 are applicable only if DUT contains more than one Logical Device.

A4.6 Setting group control

Abstract test cases

Test case	Test case description
sSg1	Request GetLogicalNodeDirectory(SGCB) and check response+. For each SGCB request GetSGCBValues and check response+
sSg2	Verify the following setting group state machine path (IEC 61850-7-2 Subclause 16 figure 22); SelectEditSG Use SetEditSGValue [FC=SE] to change values Use GetEditSGValue [FC=SE] to verify the new values ConfirmEditSGValues
sSg3	Verify SelectActiveSG (IEC 61850-7-2 Subclause 16 figure 22); SelectActiveSG of the first setting group GetSGCBValues to verify active setting group and last activation time Use GetDataValues to verify the values are of first setting group Repeat for all setting groups
sSg4	Verify that after loss of association the server cancels the editing (EditSG=0) and the client can use SelectEditSG again to copy the values to the edit buffer (IEC 61850 7-2 Subclause 16.3.3)
sSg5	Verify that when SGCB ResvTms is present The first client can edit the setting group when ResvTms = 0 A second client can not edit the setting group when ResvTms > 0 A server resets the ResvTms when it does not receive a ConfirmEditSGValues within the reservation time
sSg6	Verify that when SGCB ResvTms is not present The first client can edit the setting group A second client can't edit the setting group within a certain time (PIXIT)
sSg7	Verify that editing and activating the active setting group is allowed
sSg8	Verify that a client can cancel the editing of a setting group and that the original setting group values remain unchanged
sSg9	Request SelectEditSG of the first setting group, change one value and SelectEditSG of the second setting group without (ConfirmEditSGValues). Verify the response+
sSg10	Verify that when a setting group is being edited the SG values of that group can be read
sSg11	Verify that the active setting group number is stored in non-volatile memory
sSg12	Verify that when new settings are confirmed these settings are stored in non-volatile memory

Test case	Test case description
sSgN1	Request following setting group <u>selection</u> services with wrong parameters (out of range values, or non-existent/null setting group) and verify response- service error SelectActiveSG (IEC 61850-7-2 Subclause 16.3.2) GetSGCBValues (IEC 61850-7-2 Subclause 16.3.7)
sSgN2	Request following setting group <u>definition</u> services with wrong parameters (out of range values, or non-existent/null setting group) and verify response- service error SelectEditSG (IEC 61850-7-2 Subclause 16.3.3) SetEditSGValue (IEC 61850-7-2 Subclause 16.3.4) ConfirmEditSGValues (IEC 61850-7-2 Subclause 16.3.5) GetEditSGValue [FC=SE] (IEC 61850-7-2 Subclause 16.3.6)
sSgN3	Request SetEditSGValue on an setting group value with FC=SG, verify response- service error
sSgN4	Request SetEditSGValue and GetEditSGValue without SelectEditSG (EditSG = 0), verify response- service error
sSgN5	Verify that when a client is editing settings, another client can't edit settings

Detailed test procedures

sSg1	GetLogicalNodeDirectory(SGCB) and GetSGCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 10.2.2, 16.3.7 IEC 61850-8-1 Subclause 12.3.1, 16.2.6		
<u>Expected result</u> 1. DUT sends response+ with zero or one SGCB. The SGCB shall only be present in LLN0 and shall have the name "SGCB" 2. DUT sends GetSGCBValues response+ with the mandatory SGCB attributes		
<u>Test description</u> 1. For each logical device and logical node Client requests GetLogicalNodeDirectory(SGCB) 2. For each SGCB Client requests GetSGCBValues		
<u>Comment</u>		

sSg2	SelectEditSG, SetEditSGValue, ConfirmEditSGValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2, 16.3 IEC 61850-8-1 Subclause 16.2		
<u>Expected result</u> 1. DUT sends SelectEditSG response+ 2. DUT sends SetEditSGValue [FC=SE] response+ 3. DUT sends GetEditSGValue [FC=SE] response+ 4. DUT sends SetEditSGValue [FC=SE] response- with data access error = object-access-denied 5. DUT sends ConfirmEditSGValues response+ 6. The value of SGCB.CnfEdit shall return to FALSE once the storage is completed 7. The active (SG) values match with the edited (SE) values		
<u>Test description</u> 1. Client requests SelectEditSG 2. For each data type in the setting group that is writable (valKind=Set) Client requests SetEditSGValue [FC=SE] with a new valid value 3. Client requests GetEditSGValue [FC=SE] to verify the new values 4. For each data type in the setting group that is not writable (valKind=RO) Client requests SetEditSGValue [FC=SE] 5. Client requests ConfirmEditSGValues 6. Client requests GetSGCBValues 7. Client activates the edited setting group and request GetDataValues for each updated SG value		
<u>Comment</u>		

sSg3	SelectActiveSG	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2, 16.3 IEC 61850-8-1 Subclause 16.2.1, 16.2.5		
<u>Expected result</u> 1. DUT sends SelectActiveSG response+ 2. DUT has updated the activated setting group value and last activation time (when the setting group value has changed) 3. DUT sends GetDataValues response+		

Test description

1. Client requests SelectActiveSG of the first setting group
2. Client requests GetSGCBValues
3. Client requests GetDataValues to verify the SG values in the first setting group when available
4. Repeat steps 1 to 3 for other setting groups for this SGCB

Comment

sSg4	SelectEditSG after lost association	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------------	--	--

IEC 61850-7-2 Subclause 16.3.3
IEC 61850-8-1 Subclause 16.2.2

Expected result

1. DUT sends SelectEditSG response+
2. DUT sends SetEditSGValue [FC=SE] response+
3. DUT aborts the association
4. DUT send associate response+
5. DUT sends response+ with SGCB.EditSG = 0
6. DUT sends SelectEditSG response+ and the values in the edit buffer are refreshed.
7. DUT sends GetEditSGValue [FC=SE] response+ with the original value(s)
8. DUT sends SetEditSGValue [FC=SE] response+
9. DUT sends ConfirmEditSGValues response+

Test description

1. Client requests SelectEditSG of the first setting group
2. For each data type in the setting group that is writable (valKind=Set) Client requests a SetEditSGValue [FC=SE] with a new valid value
3. Clients aborts the association
4. Client requests associate
5. Client requests GetSGCBValues
6. Client requests SelectEditSG of the first setting group
7. Client requests GetEditSGValue [FC=SE]
8. Client requests SetEditSGValue [FC=SE] to change values
9. Client requests ConfirmEditSGValues

Comment

sSg5	SGCB reservation with ResvTms	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------------	--------------------------------------	--

IEC 61850-7-2 Subclause 16.2.2.8
IEC 61850-8-1 Subclause 16.2

Expected result

1. DUT sends SelectEditSG response+
2. DUT responds ResvTms > 0
3. DUT responds with SelectEditSG response-
5. DUT responds ResvTms = 0
6. DUT sends SelectEditSG response+

Test description

1. Client 1 requests a valid SelectEditSG on a unreserved SGCB (ResvTms = 0)
2. Client 1 requests GetSGCBValues
3. Client 2 requests SelectEditSG with the same SGCB
4. Client 1 waits 2 seconds longer than the SGCB.ResvTms value
5. Client 1 requests GetSGCBValues
6. Client 2 requests SelectEditSG with the same SGCB

Comment

sSg7	Edit the active setting group	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2 IEC 61850-8-1 Subclause 16.2.1, 16.2.5		
<u>Expected result</u>		
<ol style="list-style-type: none"> 1. DUT sends SelectActiveSG response+ 2. DUT sends SelectActiveSG response+ 3. DUT sends SelectEditSG response+ 4. DUT sends ConfirmEditSGValues response+ 5. The values in the active buffer correspond to the changes done in step 4 		
<u>Test description</u>		
<ol style="list-style-type: none"> 1. Client requests SelectActiveSG of the first setting group 2. Client requests SelectActiveSG of the first setting group 3. Client requests SelectEditSG of the first setting group 4. Client requests SetEditSGValue [FC=SE] 5. Client requests GetEditSGValue [FC=SG] of the changed setting(s) 		
<u>Comment</u>		

sSg8	Cancel editing of a setting group	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2, 16.3 IEC 61850-8-1 Subclause 16.2.1, 16.2.5		
<u>Expected result</u>		
<ol style="list-style-type: none"> 1. DUT sends SelectEditSG response+ 2. DUT sends GetEditSGValue response+ 3. DUT sends SetEditSGValue response+ 4. DUT sends SelectEditSG response+ 5. DUT sends SelectEditSG response+ 6. DUT sends GetEditSGValue response+ with the same values as in step 2 		
<u>Test description</u>		
<ol style="list-style-type: none"> 1. Client requests SelectEditSG of the first setting group 2. Client requests GetEditSGValue [FC=SE] 3. Client requests SetEditSGValue [FC=SE] with new valid values 4. Client requests SelectEditSG with group 0 (cancel) 5. Client requests SelectEditSG of the first setting group again 6. Client requests GetEditSGValue [FC=SE] 		
<u>Comment</u>		

sSg9	Select another setting group	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2 IEC 61850-8-1 Subclause 16.2.1, 16.2.5		

Expected result

1. DUT sends SelectEditSG response+
2. DUT sends GetEditSGValue response+
3. DUT sends SetEditSGValue response+
4. DUT sends SelectEditSG response+
5. DUT sends SelectEditSG response+
6. DUT sends GetEditSGValue response+ with the same values as in step 2

Test description

1. Client requests SelectEditSG of the first setting group
2. Client requests GetEditSGValue [FC=SE]
3. Client requests SetEditSGValue [FC=SE] with new valid values
4. Client requests SelectEditSG of the second setting group
5. Client requests SelectEditSG of the first setting group
6. Client requests GetEditSGValue [FC=SE]

Comment

sSg10

GetEditSGValue while editing

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 16.2
IEC 61850-8-1 Subclause 16.2.1, 16.2.5

Expected result

1. DUT sends SelectEditSG response+
2. DUT sends GetEditSGValue response+
3. DUT sends SetEditSGValue response+
4. DUT sends GetEditSGValue response+ with the same values as in step 2

Test description

1. Client requests SelectEditSG of the first setting group
2. Client requests GetEditSGValue [FC=SE]
3. Client requests SetEditSGValue [FC=SE] with new valid values
4. Client requests GetEditSGValue [FC=SG]
5. Client requests SelectEditSG with group 0 (cancel)

Comment

sSg11

Active setting group is stored in non-volatile memory

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 16.3.3
IEC 61850-8-1 Subclause 16.2.2

Expected result

1. DUT sends SelectActiveSG response+
2. DUT send Associate response+
3. DUT sends response+ with SGCB.ActSG is the same active setting group as before the reboot

Test description

1. Client requests SelectActiveSG to another setting group
2. Reboot the DUT and client requests associate
3. Client requests GetSGCBValues

Comment

sSg12	Settings are stored in non-volatile memory	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.3.3 IEC 61850-8-1 Subclause 16.2.2		
<u>Expected result</u> 1. DUT sends SelectEditSG response+ 2. DUT sends SetEditSGValue [FC=SE] response+ 3. DUT sends ConfirmEditSGValue response+ 4. DUT send associate response+ 5. DUT sends response+ with SGCB.EditSG = 0 6. DUT sends SelectEditSG response+ and the values in the edit buffer are refreshed with the new values from step 2. 7. DUT sends GetEditSGValue [FC=SE] response+ with the original value(s) 8. DUT sends SetEditSGValue [FC=SE] response+ 9. DUT sends ConfirmEditSGValues response+		
<u>Test description</u> 1. Client requests SelectEditSG of the first setting group 2. For each data type in the setting group that is writable (valKind=Set) Client requests a SetEditSGValue [FC=SE] with a new valid value 3. Clients confirms the setting group 4. Reboot the DUT and client requests associate 5. Client requests GetSGCBValues 6. Client requests SelectEditSG of the first setting group 7. Client requests GetEditSGValue [FC=SE] 8. Client requests SetEditSGValue [FC=SE] to restore the original values 9. Client requests ConfirmEditSGValues		
<u>Comment</u>		
sSgN1	Setting group selection services with wrong parameters	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2, 16.3 IEC 61850-8-1 Subclause 16.2		
<u>Expected result</u> a) DUT sends SelectActiveSG response- with data access error=object-value-invalid b) DUT sends GetSGCBValues response- with data access error=object-non-existent		
<u>Test description</u> a) Client requests SelectActiveSG with 0 and then NumOfSg+1 setting group b) Client requests GetSGCBValues with unknown object		
<u>Comment</u>		
sSgN2	Setting group definition services with wrong parameters	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.2, 16.3 IEC 61850-8-1 Subclause 16.2		

<p><u>Expected result</u></p> <ol style="list-style-type: none"> 1. DUT sends SelectEditSG response- with data access error object-value-invalid 2. DUT sends SelectEditSG response+ 3. DUT sends SetEditSGValue response- with error object-non-existent 4. DUT sends SetEditSGValue response- with error type-inconsistent 5. DUT sends SetEditSGValue response- with error object-value-invalid 6. DUT sends GetEditSGValue response- with error object-non-existent 7. DUT sends ConfirmEditSGValues response- with error object-non-existent
<p><u>Test description</u></p> <ol style="list-style-type: none"> 1. Client requests SelectEditSG with NumOfSg+1 setting group 2. Client requests SelectEditSG with first setting group 3. Client requests SetEditSGValue with unknown object reference 4. Client requests SetEditSGValue with wrong data type 5. Client requests SetEditSGValue with out-of-range value 6. Client requests GetEditSGValue[FC=SE] with unknown object reference 7. Client requests ConfirmEditSGValues with unknown SGCB reference
<p><u>Comment</u></p>

sSgN3	SetEditSGValue [FC=SG]	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.3.4 IEC 61850-8-1 Subclause 16.2.3		
<p><u>Expected result</u></p> <ol style="list-style-type: none"> 1. DUT sends SetEditSGValue response- with data access error object-access-denied 		
<p><u>Test description</u></p> <ol style="list-style-type: none"> 1. Client requests a valid SetEditSGValue with [FC=SG] 		
<p><u>Comment</u></p>		

sSgN4	SetEditSGValue and SetEditSGValue when EditSG=0	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.3.4 and 16.3.6 IEC 61850-8-1 Subclause 16.2.3 and 16.2.5		
<p><u>Expected result</u></p> <ol style="list-style-type: none"> 1. DUT sends SelectEditSG response+ 2. DUT sends SetEditSGValue response- with data access error object-access-denied (valKind="RO") or temporarily-unavailable (valKind="Set") 3. DUT sends GetEditSGValue response- with data access error temporarily-unavailable 		
<p><u>Test description</u></p> <ol style="list-style-type: none"> 1. Client requests SelectEditSG with edit setting group 0 2. Client requests a valid SetEditSGValue [FC=SE] 3. Client requests a valid GetEditSGValue [FC=SE] 		
<p><u>Comment</u></p>		



sSgN5	SelectEditSG with two clients	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 16.3.3 IEC 61850-8-1 Subclause 16.2		
<u>Expected result</u> 1. DUT sends SelectEditSG response+ 2. DUT sends SelectEditSG response- with data access error object-access-denied or temporarily-unavailable 3. DUT sends SelectEditSG response+ 4. DUT sends SelectEditSG response+ 5. DUT sends SelectEditSG response+		
<u>Test description</u> 1. Client 1 requests SelectEditSG with first setting group 2. Client 2 requests SelectEditSG with last setting group 3. Client 1 requests SelectEditSG with setting group 0 4. Client 2 requests SelectEditSG with last setting group 5. Client 2 requests SelectEditSG with setting group 0		
<u>Comment</u>		

A4.7 Unbuffered Reporting

Abstract test cases

Test case	Test case description
sRp1	Request GetLogicalNodeDirectory(URCB) and check response Request GetURCBValues of all responded URCB's
sRp2	Verify the reporting of optional fields of a URCB Configure/enable a URCB with all optional fields combinations: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name, and/or data-reference (IEC 61850-7-2 Subclause 17.2.3.2.2.1), force/trigger a report and check the reports contain the enabled optional fields
sRp3	Verify the trigger options of a URCB Configure and enable a URCB with optional fields: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name and data-reference and check the reports are transmitted according to the following trigger options: on integrity on update (dupd) on update with integrity on data change (dchg) on data and quality change on data and quality change with integrity period Verify the validity of the ReasonCode (IEC 61850-7-2 Subclause 17.2.3.2.2.9) Verify that when more trigger options are met preferably only one report is generated (IEC 61850-7-2 Subclause 17.2.3.2.3.2) Verify that reports are only sent when RptEna is set to True. (IEC 61850-7-2 Subclause 17.2.2.5), when reporting is disabled no reports shall be transmitted
sRp4	General interrogation (IEC 61850-7-2 Subclause 17.2.2.13) Setting the GI attribute of an URCB shall start the general-interrogation process. One report with the current data values will be sent. After initiation of the general-interrogation, the GI attribute is reset to False.
sRp5	Segmentation of reports Verify that if a long report does not fit in one message, the report is split into sub-reports. Enable sequence-number and report-time-stamp optional field and check validity of: (IEC 61850-7-2 Subclause 17.2.3.2.2.5) SqNum (not changed) SubSqNum (0 for first report, incrementing, roll-over) MoreSeqmentsFollow TimeOfEntry (not changed as SqNum is not altered) (IEC 61850-7-2 Subclause 17.2.3.2.2.9) Verify that an update of a data value during sending of a segmented report caused by an integrity or general-interrogation trigger can be interrupted by a report with change of one of the data values with a new sequence number. (IEC 61850-7-2 Subclause 17.2.3.2.3.5) A new request for general-interrogation shall stop the sending of remaining segments of the GI-report that is still going on. A new GI-report shall start with a new sequence number and the sub-sequence number shall be 0 (IEC 61850-7-2 Subclause 17.2.3.2.3.4)
sRp6	Configuration revision (IEC 61850-7-2 Subclause 17.2.2.7) Verify that ConfRev represents a count of the number of times the configuration of the data set referenced by DataSet has been changed. Changes that are counted are: deletion of a member of the data-set re-ordering of members in the data-set Verify that the server increments the ConfRev in case the data sets changes due to processing of ACSI services ConfRev shall never be 0 (zero) in case DataSet is not null.
sRp7	Verify that after a restart of the server, the value of ConfRev is restored to its original value of the base local configuration OR the value is retained from the configuration prior to restart (PIXIT)

Test case	Test case description
sRp8	Buffer Time (IEC 61850-7-2 Subclause 17.2.2.9) Verify that in the case where a second internal notification of the same member of a DATA-SET has occurred prior to the expiration of BufTm, the server: (IEC 61850-7-2 Subclause 17.2.2.9) shall for status information behave as if BufTm has expired and immediately send the report, restart the timer with value BufTm and process the second notification or may for analogue information behave as if BufTm has expired and immediately transmit the report for transmission, restart the timer with value BufTm and process the second notification or y for analogue information substitute the current value in the pending report with the new one. Configure Buffer Time to 1.000 ms and force a data value change of multiple dataset members within buffer time. Server shall send not more than one report per buffer time with all the data values changes since last report. Verify that the value 0 for buffer time indicates that the buffer time attribute is not used. (IEC 61850-7-2 Subclause 17.2.2.9) Verify that the BufTm value can contain at least the value 360.0000 (= 1 h in ms)
sRp9	Verify the DUT can send reports with data objects
sRp10	Verify the DUT can send reports with data attributes
sRp11	Verify the DUT send any buffered events before the integrity report
sRp12	Verify the DUT send any buffered events before the GI report
sRp13	Verify that the server sets URCB Owner to a non-NULL value when the URCB is configured by a client and reset to NULL when a client releases the URCB. For a pre-assigned URCB the server resets the Owner to the pre-assigned client address
sRp14	Verify that the DUT can process an URCB with maximum name length for RptID and DataSet (IEC 61850-7-2 Subclause 22.2)

Test case	Test case description
sRpN1	Request GetURCBValues with wrong parameters and verify response- service error (IEC 61850-7-2 Subclause 17.2.5.3)
sRpN2	Configure reporting with trigger option GI (not dchg, qchg, dupd, integrity). When enabled only GI reports are transmitted. No reports shall be send when generating events (IEC 61850-7-2 Subclause 17.2.3.2.3.4)
sRpN3	Setting the integrity period to 0 with TrgOps = integrity will result in no integrity reports will be sent (IEC 61850-7-2 Subclause 17.2.3.2.3.3)
sRpN4	Incorrect configuration of a URCB: configure when enabled, configure ConfRev and SqNum and configure with unknown data set
sRpN5	Exclusive use of URCB and lost association Configure a URCB and set the Resv attribute and enable it. Verify another client cannot set any attribute of that URCB (IEC 61850-7-2 Subclause 17.2.4.5)
sRpN6	Configure unsupported URCB options (PIXIT); Configure unsupported trigger options, optional fields and related parameters
sRpN7	Verify another client can not configure a pre-assigned URCB
sRpN8	Verify that when TrgOps - GI is not set the device does not send reports with reason code GI when RptEna=FALSE setting the GI=TRUE will fail when RptEna=TRUE resetting the GI=FALSE is accepted with no impact (no GI report)

Note: sRpN6 and sRpN7 are not applicable for part 8-1.

Detailed test procedures

sRp1	GetLogicalNodeDirectory(URCB) and GetURCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 10.2.2 and 17.2.5.3 IEC 61850-8-1 Subclause 12.3.1 and 17.2.4		
<u>Expected result</u> 1. DUT sends GetLogicalNodeDirectory(URCB) response+ with a list of URCB's 2. DUT sends GetURCBValues response+		
<u>Test description</u> 1. For each logical node Client requests GetLogicalNodeDirectory(URCB) 2. For each URCB Client requests GetURCBValues		
<u>Comment</u>		

sRp2	Reporting of optional fields for a URCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.8 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 1. DUT sends SetURCBValues response+ 2. DUT sends SetURCBValues response+ 3. DUT sends SetURCBValues response+ and sends a correct report according to IEC 61850-8-1 table 64 with all data set members for reason general-interrogation and for reason data-change only the changed data set members. The configured and reported optional fields shall match and the sequence number starts with 0 the report time stamp has UTC value and matches the trigger time the reason for inclusion matches the trigger option the configured and reported data set name do match the data-reference(s) match the data set member(s) Configuration revision matches the URCB configuration 4. DUT sends SetURCBValues response+ and sends no reports anymore		
<u>Test description</u> 1. Client configures an available URCB using SetURCBValues with all combinations of the following optional fields: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name, data-reference and conf-rev 2. Client enables the URCB (set RptEna to True) 3. Client requests a GI report (trigger option general-interrogation) or EQUIPMENT SIMULATOR triggers a report (trigger option data change) 4. Client disables the URCB (set RptEna to False) 5. Repeat step 1 to 4 for next combination of optional fields		
<u>Comment</u>		

sRp3	Trigger options for a URCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.3 IEC 61850-8-1 Subclause 8.1.3.9, 17.2, TISSUE #780, PIXIT: Rp10		

Expected result

1. DUT sends SetURCBValues response+
2. DUT sends SetURCBValues response+
3. DUT sends a report according to trigger option
integrity reports are transmitted at integrity period timeout
data change reports are transmitted at the minimum buffer timeout
the sequence number is incremented
the configured and reported optional fields shall match
the reason code(s) is one of the configured trigger options
4. DUT sends SetURCBValues response+
5. DUT does not sends reports

Test description

1. Configure an available URCB using SetURCBValues with all optional fields, the minimum BufTm and one of the following trigger options:
on integrity
on update (dupd)
on data-change
on data-change and quality-change
on data-change, quality-change and integrity with a valid integrity period
2. Client enables the RCB, set RptEna to True
3. EQUIPMENT SIMULATOR forces several data changes of one or more data set members in the data set
4. Client disables the URCB, set RptEna to False
5. EQUIPMENT SIMULATOR forces several data changes of one or more data set members in the data set
6. Repeat step 1 to 5 for next trigger option combination

Comment

sRp4	General interrogation URCB and RptID	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------------	---	--

IEC 61850-7-2 Subclause 17.2.3.2.3.4
IEC 61850-8-1 Subclause 8.1.3.9, 17.2

Expected result

2. DUT sends SetURCBValues response+ and then sends GI report
3. DUT sends GetURCBValues response+, the GI attribute is reset
7. DUT sends SetURCBValues response+ and a report where the RptID value is the exact reference of the URCB: RptID includes the index when the URCB is indexed, without index when not
9. DUT sends SetURCBValues response+ and a report where the RptID value is the configured value

Test description

1. Client configures and enables an available URCB
 2. Client requests SetURCBValues to trigger the GI report
 3. Client requests GetURCBValues
 4. Client disables the URCB
- When the URCB RptID is dynamic ("dyn")
5. Client configures the URCB RptID with an empty string
 6. Client enables the URCB and triggers the GI report
 7. Client disables the URCB
 8. Client configures the URCB RptID with a non-empty string
 9. Client enables the URCB and triggers the GI report
 10. Client disables the URCB

Comment

sRp6	Configuration revision URCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------------	------------------------------------	--

IEC 61850-7-2 Subclause 17.2.2.7 IEC 61850-8-1 Subclause 17.2
<u>Expected result</u> 2. DUT sends GetURCBValues response+ with ConfRev >0 4. The value of ConfRev is incremented
<u>Test description</u> 1. Client configures a URCB with a data-set 2. Client request GetURCBValues Client configures the same URCB with another data-set Client request GetURCBValues
<u>Comment</u>

sRp7	Configuration revision URCB after reboot	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.7 IEC 61850-8-1 Subclause 17.2, PIXIT: Rp12		
<u>Expected result</u> 3. The value of ConfRev is incremented 5. The values of ConfRev and DatSet are restored to its original value of the base local configuration OR the values are retained from the configuration prior to restart (PIXIT)		
<u>Test description</u> 1. Client request GetURCBValues 2. Client configures an URCB with a data-set 3. Client request GetURCBValues 4. Reboot the DUT 5. Client request GetURCBValues		
<u>Comment</u>		

sRp8	Buffer time URCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.9 IEC 61850-8-1 Subclause 17.2 PIXIT: Rp4		
<u>Expected result</u> 3. On second data change in BufTm DUT sends the report of the first data change, and restarts the timer, at BufTm expiration DUT sends the report of the second data change 4. DUT sends one report with both status events after BufTm of the first data change expires 5. On second data change in BufTm DUT sends the report of the first data change, restarts the timer and at BufTm expiration DUT sends the report of the second data change OR DUT substitutes the current value in the pending report with the new one and sends it at BufTm expiration. Verify the behavior matches PIXIT 6. DUT sends one report with both analogue events after BufTm of the first data change expires 7. DUT sends GetURCBValues response+ 8. DUT shall not send the pending report 9. Each data change result in a report 10. DUT accepts BufTm value 3.600.000		

Test description

1. Client configures an available URCB using SetURCBValues with a valid BufTm and all supported optional fields with the trigger conditions: data-change and quality-change. Either ST and/or MX shall be supported.
2. Client enables the URCB, set RptEna to True

If applicable (availability of status elements) perform steps 3 and 4

3. EQUIPMENT SIMULATOR forces two data changes of the same status data set element in the data set before expiration of BufTm
4. EQUIPMENT SIMULATOR forces one data change of two different status data set elements in the data set before expiration of BufTm of the first data change

If applicable (availability of analogue elements) perform steps 5 and 6

5. EQUIPMENT SIMULATOR forces two data changes of the same analogue data set element in the data set before expiration of BufTm
6. EQUIPMENT SIMULATOR forces one data change of two different analogue data set elements in the data set before expiration of BufTm
7. EQUIPMENT SIMULATOR forces one data change and Client disables the URCB before the DUT sends the pending report
8. Client enables the same URCB again
9. Client disables the URCB, Client sets BufTm to zero; repeat steps 2 to 6
10. Client disables the URCB, Client sets BufTm to 3.600.000

Comment

Tested with Status elements (ST) and Analogue elements (MX).

sRp9	Report data objects (FCD)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 2. Verify the DUT does report the whole data object		
<u>Test description</u> 1. Client configures an available URCB using SetURCBValues with a data-set that contains at least one data object, and all optional fields with the trigger option: data-change 2. Change a data attribute within one data object in the data-set		
<u>Comment</u>		

sRp10	Report data attributes (FCDA)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2 IEC 61850-8-1 Subclause 17.2 PIXIT: Sr1, Sr2		
<u>Expected result</u> 2. DUT reports the "data" attribute. The "timestamp" and "quality" attributes are not sent 3. DUT reports the "quality" attribute. The "timestamp" and "data" attributes are not sent 4. All attributes are reported 5. All attributes are reported		

<u>Test description</u> 1. Client configures an available URCB using SetURCBValues with a data-set that contains the "data", "quality" and "timestamp" attributes of a data object, and the trigger options: data-change, quality-change, integrity and general-interrogation. 2. Force a change of a data attribute value 3. Force a change of a quality attribute value 4. Request a general interrogation 5. Wait for integrity report
<u>Comment</u>

sRp11	Send buffered events before integrity report	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.3.3 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 3. DUT does send 2 reports: first a report with the buffered data-change and then the integrity report		
<u>Test description</u> 1. Client configures an available URCB using SetURCBValues with a valid BufTm, a valid IntgPd whose value is smaller than the BufTm value and all optional fields with the trigger options: data-change and integrity 2. Client enables the URCB, set RptEna to True 3. EQUIPMENT SIMULATOR forces a data change in the data set, wait for integrity report 4. Client disables the URCB		
<u>Comment</u>		

sRp12	Send buffered events before GI report	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.3.3 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 4. DUT does send 2 reports: first a report with the buffered data-change and then the GI report		
<u>Test description</u> 1. Client configures an available URCB using SetURCBValues with all optional fields, with a valid BufTm and with the trigger options: data-change and integrity 2. Client enables the URCB, set RptEna to True 3. EQUIPMENT SIMULATOR forces a data change in the data set 4. Client requests SetURCBValues with GI=TRUE before BufTm expiration 5. Client disables the URCB		
<u>Comment</u>		

sRp13	URCB owner	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.18 IEC 61850-8-1 Subclause 17.1.2, TISSUE #951		

<u>Expected result</u> 1. Owner is empty 3. Owner is the IP-address of the Client or gateway 5. Owner is the IP-address of the Client or gateway 7. Owner is empty
<u>Test description</u> 1. Client requests GetURCBValues of a free (not pre-assigned) URCB 2. Client configures an available URCB using SetURCBValues 3. Client requests GetURCBValues 4. Client disables the URCB 5. Client requests GetURCBValues 6. Client requests SetURCBValues with Resv=False 7. Client requests GetURCBValues
<u>Comment</u> TISSUE #951 states the for example IP-address 192.168.0.23 shall be encoded as C0A80017

sRp14	Max URCB name length	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 22.2 IEC 61850-8-1 Subclause 17.1.3		
<u>Expected result</u> 2. DUT sends SetURCBValues response+ 3. DUT sends SetURCBValues response+ 4. DUT sends GI report with correct data set name and report ID value		
<u>Test description</u> 1. Configure DUT with URCB with maximum name length (32 including the index), with maximum name length of the data set (32 chars) and report ID (129 chars) when these attributes are not fixed ("fix") 2. Client requests SetURCBValues of another URCB with maximum length data set and maximum length report ID when these attributes are dynamic ("dyn") 3. Client enables both URCBs with at least OptFlds data-set-name and trigger condition GI 4. Client requests SetURCBValues with GI=true 5. Client disables both URCBs		
<u>Comment</u>		

sRpN1	Incorrect GetURCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.5.3 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 1. DUT sends response with data access error "object-non-existent"		
<u>Test description</u> 1. Client request GetURCBValues with unknown URCB object		
<u>Comment</u>		

sRpN2	Only trigger option GI	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	-------------------------------	--

IEC 61850-7-2 Subclause 17.2.3.2.2.9
IEC 61850-8-1 Subclause 17.2

Expected result

3. DUT does not send reports

Test description

1. Configure an available URCB using SetURCBValues with all optional fields, BufTm=0, IntgPd=1000 and only trigger option general-interrogation
2. Client enables the URCB, set RptEna to True
3. EQUIPMENT SIMULATOR forces several data set changes of one or more data set members in the data set

Comment

sRpN3

Integrity period zero URCB

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 17.2.3.2.2.9
IEC 61850-8-1 Subclause 17.2

Expected result

4. DUT does not send reports when reporting is enabled

Test description

1. Configure an available URCB using SetURCBValues with trigger option Integrity and integrity period 0
2. Wait one minute
3. Client enables the URCB, set RptEna to True
4. Wait one minute
5. Client disables the URCB, set RptEna to False

Comment

sRpN4

Incorrect configuration of URCB

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 17.2.5.4
IEC 61850-8-1 Subclause 17.1.3, 8.1.3.4.3, Table 61

Expected result

2. DUT sends SetURCBValues response- with data access error "temporarily-unavailable"
4. DUT sends SetDataValues response- with data access error "object-access-denied"
5. DUT sends SetURCBValues response- with data access error "object-access-denied"
6. DUT sends SetURCBValues response- with data access error "object-value-invalid"
7. DUT sends SetURCBValues response- with data access error "temporarily-unavailable"

Test description

1. Client configures and enables an available URCB
2. Client requests SetURCBValues with one of the following "dyn" attributes: RptID, DatSet, OptFlds, BufTm, TrgOps, IntgPd
3. Client disables the URCB
4. Client requests SetDataValues with one of the following attributes: ConfRev, SqNum, TimeOfEntry and Owner (when available)
5. Client requests SetURCBValues with the "fix" or "conf" attributes from step 2
6. Client requests SetURCBValues with unknown DatSet (when DatSet is "dyn")
7. Client enables an URCB with empty DatSet

Comment

sRpN5	Exclusive use of URCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.1 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 2. DUT sends SetURCBValues response- with data access error = temporarily-unavailable 4. DUT sends SetURCBValues response+ 8. DUT sends SetURCBValues response+		
<u>Test description</u> 1. Client1 reserves an available URCB 2. Client2 reserves and configures the same URCB by requesting SetURCBValues with one of the following dynamic ("dyn") attributes Resv, RptID, DatSet, OptFlds, BufTm, TrgOps, IntgPd 3. Client1 resets the reservation of the URCB 4. Client2 reserves and configures the URCB 5. Client2 resets the reservation of the URCB 6. Client1 reserves the URCB 7. Client1 aborts and re-establishes the association 8. Client1 configures the URCB 9. Client1 resets the reservation of the URCB		
<u>Comment</u>		

sRpN8	Trigger option GI not set	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.2.9 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 1. DUT sends SetURCBValues response+ 2. DUT sends SetURCBValues response+, however sends no GI report 3. DUT sends SetURCBValues response+ 4. DUT sends SetURCBValues response- with data access error "temporarily unavailable" 5. DUT sends SetURCBValues response+ 6. DUT sends SetURCBValues response+ and sends no GI report 7. DUT sends SetURCBValues response+ and does send the GI report		
<u>Test description</u> 1. Client configures and enables an available URCB without trigger option general-interrogation 2. Client requests SetURCBValues with GI=TRUE 3. Client disables the URCB and set trigger option general-interrogation 4. Client requests SetURCBValues with GI=TRUE 5. Client enables the URCB 6. Client requests SetURCBValues with GI=FALSE 7. Client requests SetURCBValues with GI=TRUE		
<u>Comment</u>		

A4.8 Buffered Reporting

Abstract test cases

Test case	Test case description
sBr1	Request GetLogicalNodeDirectory(BRCB) and check response Request GetBRCBValues of all responded BRCB's
sBr2	Verify the reporting of optional fields of a BRCB Configure/enable a BRCB with all optional fields combinations: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name, data-reference, buffer-overflow, and/or entryID (IEC 61850-7-2 Subclause 17.2.3.2.2.1), force/trigger a report and check the reports contain the enabled optional fields
sBr3	Verify the trigger options of a BRCB Configure and enable a BRCB with optional fields: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name, data-reference, buffer-overflow, and entryID and check the reports are transmitted according to the following trigger options: on integrity on update (dupd) on update with integrity on data change (dchg) on data and quality change on data and quality change with integrity period Verify the validity of the ReasonCode (IEC 61850-7-2 Subclause 17.2.3.2.2.9) Verify that when more trigger options are met preferably only one report is generated (IEC 61850-7-2 Subclause 17.2.3.2.3.2) Verify that reports are only sent when RptEna is set to True. (IEC 61850-7-2 Subclause 17.2.2.5), when reporting is disabled no reports shall be transmitted
sBr4	General interrogation (IEC 61850-7-2 Subclause 17.2.2.13) Setting the GI attribute of a BRCB shall start the general-interrogation process. One report with the current data values will be sent. After initiation of the general-interrogation, the GI attribute is reset to False.
sBr5	Segmentation of reports Verify that if a long report does not fit in one message, the report is split into sub-reports. Enable sequence-number and report-time-stamp optional field and check validity of: (IEC 61850-7-2 Subclause 17.2.3.2.2.5) SqNum (not changed) SubSqNum (0 for first report, incrementing, roll-over) MoreSeqmentsFollow TimeOfEntry (not changed as SqNum is not altered) (IEC 61850-7-2 Subclause 17.2.3.2.2.9) Verify that an update of a data value during sending of a segmented report caused by an integrity or general-interrogation trigger can be interrupted by a report with change of one of the data values with a new sequence number. (IEC 61850-7-2 Subclause 17.2.3.2.3.5) A new request for general-interrogation shall stop the sending of remaining segments of the GI-report that is still going on. A new GI-report shall start with a new sequence number and the sub-sequence number shall be 0 (IEC 61850-7-2 Subclause 17.2.3.2.3.4) Verify that when OptFlds=sequence-number is NOT set, neither SubSqNum nor SqNum are present in the sub-reports (IEC 61850-7-2 Subclause 17.2.3.2.2.4 and 17.2.3.2.2.5)
sBr6	Configuration revision (IEC 61850-7-2 Subclause 17.2.2.7) Verify that ConfRev represents a count of the number of times the configuration of the data set referenced by DatSet has been changed. Changes that are counted are: deletion of a member of the data-set re-ordering of members in the data-set Verify that the server increments the ConfRev in case the data sets changes due to processing of ACSI services ConfRev shall never be 0 (zero) in case DatSet is not null
sBr7	Verify that after a restart of the server, the value of ConfRev is restored to its original value of the base local configuration OR the value is retained from the configuration prior to restart (PIXIT)

sBr8	<p>Buffer Time (IEC 61850-7-2 Subclause 17.2.2.9) Verify that in the case where a second internal notification of the same member of a DATA-SET has occurred prior to the expiration of BufTm, the server: (IEC 61850-7-2 Subclause 17.2.2.9) shall for status information behave as if BufTm has expired and immediately send the report, restart the timer with value BufTm and process the second notification or may for analogue information behave as if BufTm has expired and immediately transmit the report for transmission, restart the timer with value BufTm and process the second notification or may for analogue information substitute the current value in the pending report with the new one. Configure Buffer Time to 1.000 ms and force a data value change of multiple dataset members within buffer time. Server shall send not more than one report per buffer time with all the data values changes since last report. Verify that the value 0 for buffer time indicates that the buffer time attribute is not used. (IEC 61850-7-2 Subclause 17.2.2.9) Verify that the BufTm value can contain at least the value 3.600.000 (= 1 h in ms)</p>
sBr9	Verify the DUT can send reports with data objects
sBr10	Verify the DUT can send reports with data attributes
sBr11	Verify that all buffered events shall be sent before integrity reports can be sent (IEC 61850-7-2 Subclause 17.2.3.2.3.3)
sBr12	Verify that all buffered events shall be sent before the GI report can be sent (IEC 61850-7-2 Subclause 17.2.3.2.3.3)
sBr13	Verify that the server sets BRCB Owner to a non-NULL value when the BRCB is configured by a client and reset to NULL when a client releases the BRCB. For a pre-assigned BRCB the server resets the Owner to the pre-assigned client address
sBr14	Verify that the DUT can process a BRCB with maximum name length for RptID and DataSet (IEC 61850-7-2 Subclause 22.2)
	Specific to BRCB (leave a gap for future sRp test cases)
sBr20	<p>Buffered reporting (BRCB) state machine (IEC 61850-7-2 Subclause 17.2.2 figure 24) with setting the EntryID Verify events are buffered after the association is released Verify reporting is disabled after the association is lost Verify that not received reports while not associated are received now in the correct order (SOE) (IEC 61850-7-2 Subclause 17.2.1, IEC 61850-7-2 Subclause 17.2.2.5) Do the same but now set PurgeBuf to True before enabling the reporting. No stored buffered reports shall be send (IEC 61850-7-2 Subclause 17.2.2.14) Force buffer overflow, the OptFlds buffer-overflow shall be set in the first report that is sent with events that occurred after the overflow. (IEC 61850-7-2 Subclause 17 2.3.2.2.8)</p>
sBr21	<p>Buffered reporting (BRCB); buffering events (IEC 61850-7-2 Subclause 17.2.3.2.3.6) without setting the EntryID Verify that after the association is available again and after the client has NOT set the EntryID, and enabled the BRCB, the BRCB shall start sending the both already sent reports and new reports of events that have been buffered. The BRCB shall use the sequence and subsequence numbers so that no gaps occur.</p>
sBr22	Verify that integrity reports are buffered
sBr23	<p>Verify successful ResvTms behaviour On ResvTms = -1 the BRCB can be used by the pre-assigned client On ResvTms = 0 a client can reserve the BRCB by writing a value and configure the BRCB On lost association the reserved BRCB is released after the ResvTms number of seconds (ResvTms set to zero) On lost association, within ResvTms time none of other clients can reserve the BRCB except the one who did it originally (the client restores association)</p>
sBr24	<p>Verify that a SetBRCBValues request, for setting ResvTms, shall: Generate a negative response if the BRCB's ResvTms value = -1. Generate a negative response if the BRCB's ResvTms value is non-zero and if the SetBRCBValues request is being issued by another client for whom the BRCB is not reserved. Generate a negative response if the ResvTms value to be set is negative.</p>

sBr25	Verify that a change of one of the following BRCB parameters purges the buffer: RptID, BufTm, TrgOps, IntgPd, DatSet. A change of OptFlds shall not purge the buffer. (IEC 61850-7-2 Table 37)
sBr26	Verify that after setting an invalid, null or non-existing EntryID the DUT sends all reports in the buffer
sBr27	Verify that when the BRCB state is RptEna=FALSE a GetBRCBValues shall return the EntryID value that represents the last (newest) entry that has been entered into the buffer. And when the BRCB RptEna=TRUE: The value of EntryID, returned in a GetBRCBValues response, shall be the EntryID of the last EntryID formatted and queued for transmission.
sBr28	Verify that only the last buffered GI report is transmitted after restoring a lost association

Test case	Test case description
sBrN1	Request GetBRCBValues with wrong parameters and verify response- service error (IEC 61850-7-2 Subclause 17.2.3.3.2)
sBrN2	Configure reporting with trigger option GI (not dchg, qchg, dupd, integrity). When enabled only GI reports are transmitted. No reports shall be send when generating events (IEC 61850-7-2 Subclause 17.2.3.2.3.4)
sBrN3	Setting the integrity period to 0 with TrgOps = integrity will result in no integrity reports will be sent (IEC 61850-7-2 Subclause 17.2.2.12)
sBrN4	Incorrect configuration of a BRCB: configure when enabled, configure ConfRev and SqNum and configure with unknown data set
sBrN5	Exclusive use of BRCB and lost association Configure a BRCB and enable it. Verify another client can not set attributes value in this BRCB. (IEC 61850-7-2 Subclause 17.2.1)
sBrN6	Configure unsupported BRCB options (PIXIT); Configure unsupported trigger options, optional fields and related parameters
sBrN7	Verify another client can not configure a pre-assigned BRCB
sBrN8	Verify that when TrgOps - GI is not set the device does not send reports with reason code GI when RptEna=FALSE setting the GI=TRUE will fail when RptEna=TRUE resetting the GI=FALSE is accepted with no impact (no GI report)

Note: sBrN6 and sBrN7 are not applicable for part 8-1

Detailed test procedures

sBr1	GetLogicalNodeDirectory(BRCB) and GetBRCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 10.2.2 and 17.2.3.3 IEC 61850-8-1 Subclause 12.3.1 and 17.2.2		
<u>Expected result</u>		
1. DUT sends GetLogicalNodeDirectory(BRCB) response+ with a list of BRCB's 2. DUT sends GetBRCBValues response+		
<u>Test description</u>		
1. For each logical node Client requests GetLogicalNodeDirectory(BRCB) 2. For each BRCB Client requests GetBRCBValues		
<u>Comment</u>		

sBr2	Reporting of optional fields for a BRCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
-------------	--	--

IEC 61850-7-2 Subclause 17.2.2.8
IEC 61850-8-1 Subclause 17.2.1

Expected result

1. DUT sends SetBRCBValues response+
2. DUT sends SetBRCBValues response+
3. DUT sends a correct report according to trigger option and IEC 61850-8-1 table 64 with all data set members for reason integrity and otherwise only the changed members. The configured and reported optional fields shall match
the sequence number starts with 0
the report time stamp has UTC value and matches the trigger time
the reason for inclusion matches the trigger option
the configured and reported data set name do match
the data-reference(s) match the data set member(s)
EntryID not zero
Configuration revision matches the BRCB configuration
4. DUT sends SetBRCBValues response+ and sends no reports anymore

Test description

1. Client configures an available BRCB using SetBRCBValues with all combinations of the following optional fields: sequence-number, report-time-stamp, reason-for-inclusion, data-set-name, data-reference, buffer overflow, entryID and conf-rev
2. Client enables the BRCB (set RptEna to True)
3. Client waits for a report (trigger option integrity) or EQUIPMENT SIMULATOR triggers a report (trigger option data-change)
4. Client disables the BRCB (set RptEna to False)
5. Repeat step 1 to 4 for next combination of optional field

Comment

sBr3	Trigger options for a BRCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.8 IEC 61850-8-1 Subclause 8.1.3.9, 17.2.1, TISSUE #780, PIXIT: Rp10		
<p><u>Expected result</u></p> <ol style="list-style-type: none"> 1. DUT sends SetBRCBValues response+ 2. DUT sends SetBRCBValues response+ 3. DUT sends a report according to trigger option integrity reports shall be transmitted immediately at timeout data change reports are transmitted immediately after buffer timeout the first report has sequence number 0 the sequence number is incremented the configured and reported optional fields shall match the reason code(s) is one of the configured trigger options 4. DUT sends SetBRCBValues response+ 5. DUT does not sends reports 		
<p><u>Test description</u></p> <ol style="list-style-type: none"> 1. Configure an available BRCB using SetBRCBValues with all optional fields, minimum BufTm and one of the following trigger options: on integrity on update (dupd) on data-change on data-change and quality-change on data-change, quality-change and integrity with a valid integrity period 2. Client enables the BRCB, set RptEna to True 3. EQUIPMENT SIMULATOR forces several data changes of one or more data set members in the data set 4. Client disables the BRCB, set RptEna to False 5. EQUIPMENT SIMULATOR forces several data changes of one or more data set members in the data set 6. Repeat step 1 to 5 for next trigger option combination 		

Comment

sBr4	General interrogation BRCB and RptID	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.8, 17.2.2.13 IEC 61850-8-1 Subclause 8.1.3.8, 17.2.1		
<u>Expected result</u> 3. DUT sends SetBRCBValues response+ and then sends GI report 4. DUT sends GetBRCBValues response+ with GI attribute not set 7. DUT sends SetBRCBValues response+ and a report where the RptID value is the exact reference of the BRCB: RptID includes the index when the BRCB is indexed, without index when not 10. DUT sends SetBRCBValues response+ and a report where the RptID value is the configured value		
<u>Test description</u> 1. Client configures an available BRCB 2. Client enables the BRCB 3. Client requests SetBRCBValues to set the GI report 4. Client requests GetBRCBValues 5. Client disables the BRCB When the BRCB RptID is dynamic ("dyn") 6. Client configures the BRCB RptID with an empty string 7. Client enables the BRCB and triggers the GI report 8. Client disables the BRCB 9. Client configures the BRCB RptID with a non-empty string 10. Client enables the BRCB and triggers the GI report 11. Client disables the BRCB		
<u>Comment</u>		

sBr6	Configuration revision	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.7 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 2. DUT sends GetBRCBValues response+ with ConfRev >0 4. The value of ConfRev is incremented		
<u>Test description</u> 1. Client configures a BRCB to use a data set 2. Client request GetBRCBValues 3. Client configures the same BRCB with another data set 4. Client request GetBRCBValues		
<u>Comment</u>		

sBr7	Configuration revision BRCB after reboot	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.7 IEC 61850-8-1 Subclause 17.2.1 PIXIT: Rp12		

<u>Expected result</u> 3. The value of ConfRev is incremented 5. The values of ConfRev and DatSet are restored to its original value of the base local configuration OR the values are retained from the configuration prior to restart (PIXIT)
<u>Test description</u> 1. Client request GetBRCBValues 2. Client configures a BRCB with a data set 3. Client request GetBRCBValues 4. Reboot the DUT 5. Client request GetBRCBValues
<u>Comment</u>

sBr8	Buffer time	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.9 IEC 61850-8-1 Subclause 17.2 PIXIT:Rp4		
<u>Expected result</u> 3. On second data change in BufTm DUT sends the report of the first data change, and restarts the timer, at BufTm expiration DUT sends the report of the second data change 4. DUT sends one report with both status events after BufTm of the first data change expires 5. On second data change in BufTm DUT sends the report of the first data change, restarts the timer and at BufTm expiration DUT sends the report of the second data change OR DUT substitutes the current value in the pending report with the new one and sends it at BufTm expiration. Verify the behavior matches PIXIT 6. DUT sends one report with both analogue events after BufTm of the first data change expires 7. Each data change result in a report 8. DUT accepts BufTm value 3.600.000		
<u>Test description</u> 1. Client configures an available BRCB using SetBRCBValues with a valid BufTm and all supported optional fields with the trigger conditions: data-change and quality-change. Either ST and/or MX shall be supported. 2. Client enables the BRCB, set RptEna to True If applicable (availability of status elements) perform steps 3 and 4 3. EQUIPMENT SIMULATOR forces two data changes of the same status data set element in the data set before expiration of BufTm 4. EQUIPMENT SIMULATOR forces one data change of two different status data set elements in the data set before expiration of BufTm of the first data change If applicable (availability of analogue elements) perform steps 5 and 6 5. EQUIPMENT SIMULATOR forces two data changes of the same analogue data set element in the data set before expiration of BufTm 6. EQUIPMENT SIMULATOR forces one data change of two different analogue data set elements in the data set before expiration of BufTm 7. Client disables the BRCB, Client sets BufTm to zero; repeat steps 2 to 6 8. Client disables the BRCB, Client sets BufTm to 3.600.000		
<u>Comment</u> Tested with Status elements (ST) and Analogue elements (MX).		

sBr9	Report data objects (FCD)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2 IEC 61850-8-1 Subclause 17.2		

<u>Expected result</u>
2. Verify the DUT does report the whole data object
<u>Test description</u>
1. Client configures an available BRCB using SetBRCBValues with a data-set that contains at least one data object, and all optional fields with the trigger option: data-change
2. Change a data attribute within one data object in the data-set
<u>Comment</u>

sBr10	Report data attributes (FCDA)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2 IEC 61850-8-1 Subclause 17.2 PIXIT: Sr1, Sr2		
<u>Expected result</u>		
2. DUT reports the "data" attribute. The "timestamp" and "quality" attributes are not sent		
3. DUT reports the "quality" attribute. The "timestamp" and "data" attributes are not sent		
4. All attributes are reported		
5. All attributes are reported		
<u>Test description</u>		
1. Client configures an available BRCB using SetBRCBValues with a data-set that contains the "data", "quality" and "timestamp" attributes of a data object, and the trigger options: data-change, quality-change, integrity and general-interrogation.		
2. Force a change of a data attribute value		
3. If supported, force a change of a quality attribute value		
4. Request a general interrogation		
5. Wait for integrity report		
<u>Comment</u>		

sBr11	Send buffered events before integrity report	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.3.3 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u>		
3. DUT does send 2 reports: first a report with the buffered data change event and then the integrity report		
<u>Test description</u>		
1. Client configures an available BRCB using SetBRCBValues with a valid BufTm, a valid IntgPd whose value is smaller than the BufTm value and all optional fields with the trigger options: data-change and integrity		
2. Client enables the BRCB, set RptEna to True		
3. EQUIPMENT SIMULATOR forces a data change in the data set, wait for integrity report		
4. Client disables the BRCB		
<u>Comment</u>		

sBr12	Send buffered events before GI report	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	--	--

IEC 61850-7-2 Subclause 17.2.3.2.3.3 IEC 61850-8-1 Subclause 17.2	
<u>Expected result</u>	
4.	DUT does send 2 reports: first a report with the buffered data-change and then the general interrogation report
<u>Test description</u>	
1.	Client configures an available BRCB using SetBRCBValues with all optional fields, with a valid BufTm and with the trigger options: data change and general-interrogation
2.	Client enables the BRCB, set RptEna to True
3.	EQUIPMENT SIMULATOR forces a change in the data set
4.	Client requests SetBRCBValues(GI=TRUE) before BufTm expiration
5.	Client disables the BRCB
<u>Comment</u>	

sBr13	BRCB owner	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.18 IEC 61850-8-1 Subclause 17.1.2 TISSUE #951		
<u>Expected result</u>		
1.	Owner is empty	
3.	Owner is the IP-address of the Client or gateway	
5.	Owner is the IP-address of the Client or gateway	
7.	Owner is empty	
<u>Test description</u>		
1.	Client requests GetBRCBValues of a free (not pre-assigned) BRCB	
2.	Client configures this BRCB using SetBRCBValues	
3.	Client requests GetBRCBValues	
4.	Client disables the BRCB	
5.	Client requests GetBRCBValues	
6.	Client releases the association, waits more then the reservation time and associates again	
7.	Client requests GetBRCBValues	
<u>Comment</u>		
TISSUE #951 states that for example IP-address 192.168.0.23 shall be encoded as C0A80017		

sBr14	Max BRCB name length	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 22.2 IEC 61850-8-1 Subclause 17.1.2		
<u>Expected result</u>		
2.	DUT sends SetBRCBValues response+	
3.	DUT sends SetBRCBValues response+	
4.	DUT sends GI report with correct data set name and report ID value	

Test description

1. Configure DUT with BRCB with maximum name length (32 including the index), with maximum name length of the data set (32 chars) and report ID (129 chars) when these attributes are not fixed ("fix")
2. Client requests SetBRCBValues of another BRCB with maximum length dataset and report ID when these attributes are dynamic ("dyn")
3. Client enables both BRCBs with at least OptFlds data-set-name and trigger condition GI
4. Client requests SetBRCBValues with GI=true
5. Client disables both BRCBs

Comment

Specific test procedures for buffered reporting

sBr20	Buffered reporting state machine with setting the EntryID	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	--	--

IEC 61850-7-2 Subclause 17.2.1, 17.2.2.14, 17.2.2.5, 17.2.3...8
IEC 61850-8-1 Subclause 17.2.1
PIXIT: Rp7

Expected result

- 1 to 6: Events are buffered, the EntryID value is not equal to the last received EntryID
7. The DUT sends SetBRCBValues response+ when the EntryID value exists in the queue of entries and response- when the EntryID value does not exist (buffer overflow)
8. The DUT sends reports in the time sequence order starting with the next event after the event specified in EntryID
9. The DUT sends reports in the time sequence order starting with the next event after the event specified in EntryID
10. Reports that are buffered while not associated have been purged, purged reports are not sent after enabling the BRCB. The first report is the GI report
11. The Optional field buffer-overflow shall be set only in the first report that is sent after enabling the BRCB. All reports that are in the buffer are sent in time sequence order.

Test description

1. Client configures an available BRCB with all optional fields with the trigger data-change and general-interrogation
2. Client enables the BRCB (set RptEna to True)
3. EQUIPMENT SIMULATOR forces several data changes
4. Client requests Release
5. EQUIPMENT SIMULATOR forces several more data changes
6. Client re-establishes the association and requests GetBRCBValues
7. Client sets the EntryID to the last received report in the BRCB
8. Client enables the BRCB, wait for report(s) and disables the BRCB
9. Repeat steps 2-8, but Abort the association at step 4
10. Repeat steps 2-8, but set PurgeBuf=TRUE instead of EntryID at step 7 and force a GI at step 8
11. Repeat steps 2-8, but generate more data changes in step 5 than the buffer can hold, to force a buffer overflow (PIXIT)

Comment

sBr21	Buffered reporting state machine without setting EntryID	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	---	--

IEC 61850-7-2 Subclause 17.2.1, 17.2.2.14, 17.2.2.5, 17.2.3...8
IEC 61850-8-1 Subclause 17.2.1
PIXIT: Rp7

<p><u>Expected result</u></p> <p>1 to 6: Events are buffered, the EntryID value is not the same as the EntryID in the last received report 7. The Optional field buffer-overflow shall be set only in the first report that is sent after enabling the BRCB. All reports that are in the buffer (from step 2 and step 5) are sent in time sequence order</p>
<p><u>Test description</u></p> <ol style="list-style-type: none"> Client configures an available BRCB with all optional fields with the trigger data-change Client enables the BRCB (set RptEna to True) EQUIPMENT SIMULATOR forces several data changes Client requests Release EQUIPMENT SIMULATOR forces several more data changes Client re-establishes the association and requests GetBRCBValues Client enables the BRCB, wait for report(s) and disables the BRCB
<p><u>Comment</u></p>

sBr22	Buffered reporting of integrity reports	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.1, 17.2.2.14, 17.2.2.5, 17.2.3...8 IEC 61850-8-1 Subclause 17.2.1 PIXIT: Rp7		
<p><u>Expected result</u></p> <p>1 to 6: Events are buffered and the EntryID value is not the same as the EntryID in the last received report 7. The DUT sends SetBRCBValues response+ 8. The DUT sends (integrity) reports in the time sequence order starting with the next event after the event specified in EntryID</p>		
<p><u>Test description</u></p> <ol style="list-style-type: none"> Client configures an available BRCB with all optional fields with the trigger integrity Client enables the BRCB (set RptEna to True) Wait for several integrity periods Client requests Release Wait for several integrity periods Client re-establishes the association and requests GetBRCBValues Client sets the EntryID to the last received report in the BRCB Client enables the BRCB, wait for integrity report(s) and disables the BRCB 		
<p><u>Comment</u></p>		

sBr25	Buffer is purged on re-configuration	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3, Table 37 IEC 61850-8-1 Subclause 17.2		
<p><u>Expected result</u></p> <p>dchg and integrity reports are received. the EntryID is not the same as the EntryID in the last received report 8..12. The buffer is purged, purged reports are not transmitted. The first report has a report time stamp value later than the time stamp of enabling the BRCB 13. The buffer is NOT purged, buffered reports are transmitted</p>		

Test description

1. Client configures a BRCB with all optional fields with the trigger options: data-change and Integrity with a valid Integrity period
2. Client enables the BRCB (set RptEna to True)
3. EQUIPMENT SIMULATOR forces several data changes
4. Client requests Release
5. EQUIPMENT SIMULATOR forces several more data changes
6. Client re-establishes the association and requests GetBRCBValues
7. Client changes the RptID, when rptid is "dyn"
8. Client enables the BRCB and waits at least one integrity period
9. Repeat step 3 to 8 and at step 7 client changes the BufTm, when buftm is "dyn"
10. Repeat step 3 to 8 and at step 7 client changes the TrgOps, when trgops is "dyn"
11. Repeat step 3 to 8 and at step 7 client changes the IntgPd, when intgpd is "dyn"
12. Repeat step 3 to 8 and at step 7 client changes the DatSet, when dataset is "dyn"
13. Repeat step 3 to 8 and at step 7 client changes the OptFlds, when optflds is "dyn"

Comment

sBr26

Unkown and all zero EntryID

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 17.2.3.2.2.9, 17.2.2.15, 17.2.2.1
IEC 61850-8-1 Subclause 17.1.2

Expected result

3. The DUT sends data-change and integrity reports
7. DUT sends SetBRCBValues response- with data access error code object-value-invalid
8. DUT responds with the EntryID value of the last Entry entered in the buffer
9. All reports in the buffer are transmitted (the BRCB transits from disabled to enabled state). The BufOvl flag is only set in the first report
12. DUT sends SetBRCBValues response+
13. DUT responds with the EntryID value of the last Entry entered in the buffer
14. All reports in the buffer are transmitted. The BufOvl flag is only set in the first report

Test description

1. Client configures a BRCB with all optional fields with the trigger options data-change and integrity with a valid integrity period
2. Client enables the BRCB (set RptEna to True)
3. EQUIPMENT SIMULATOR forces several data changes
4. Client requests Release
5. EQUIPMENT SIMULATOR forces several more data changes
6. Client re-establishes the association and requests GetBRCBValues
7. Client sets an unknown EntryID value
8. Client requests GetBRCBValues
9. Client enables the BRCB and waits for some reports
10. Client disables the BRCB
11. Repeat steps 2 to 6
12. Client sets an all zero EntryID value
13. Client requests GetBRCBValues
14. Client enables the BRCB and waits for some reports
15. Client disables the BRCB

Comment

On setting an all zero EntryID the state shall transition from resync to disabled (clause 17.2.2.1).

sBr27

GetBRCBValues and EntryID

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 17.2.3.2.2.9
IEC 61850-8-1 Subclause 17.1.2

Expected result

- 3. DUT sends data-change and integrity reports
- 7. DUT responds the EntryID of the last entry that has been entered into the buffer (this value is different from the EntryID received in the last report)
- 9. DUT transmits the reports in the buffer (not transmitted before)
- 10. DUT responds the EntryID of last entry that has been formatted and queued for transmission
- 12. DUT responds the EntryID of the last entry that has been entered into the buffer
- 14. DUT responds the EntryID of the last entry that has been entered into the buffer
- 15. DUT transmits all reports in the buffer (including the reports transmitted before)
- 16. DUT responds the EntryID of last entry that has been formatted and queued for transmission

Test description

- 1. Client configures a BRCB with all optional fields with the trigger option data change and integrity with a valid integrity period
- 2. Client enables the BRCB (set RptEna to True)
- 3. EQUIPMENT SIMULATOR forces several data changes
- 4. Client requests Release
- 5. EQUIPMENT SIMULATOR forces several more data changes
- 6. Client re-establishes the association
- 7. Client request GetBRCBValues
- 8. Client sets EntryID to last received EntryID
- 9. Client enables the BRCB
- 10. Client request GetBRCBValues while DUT is sending buffered reports
- 11. Client disables the BRCB
- 12. Client request GetBRCBValues
- 13. Client sets EntryID = 0
- 14. Client request GetBRCBValues
- 15. Client enables the BRCB
- 16. Client request GetBRCBValues while DUT is sending buffered reports
- 17. Client disables the BRCB

Comment

sBr28

Only last GI report is transmitted

- Passed
- Failed
- Inconclusive

IEC 61850-7-2 Subclause 17.2.3
IEC 61850-8-1 Subclause 17.1.2

Expected result

- 3. DUT transmits the integrity reports and 3 GI reports
- 8. DUT transmits the old and new integrity reports and only the last GI report

Test description

- 1. Client configures a BRCB with all optional fields with the trigger option data change and integrity with a valid integrity period
- 2. Client enables the BRCB (set RptEna to True)
- 3. Client requests GI report 3 times
- 4. Client requests Release and waits several integrity periods
- 5. Client re-establishes the association
- 6. Client sets EntryID to all zero
- 7. Client request GetBRCBValues
- 8. Client enables the BRCB

Comment

sBrN1

Incorrect GetBRCBValues

- Passed
- Failed
- Inconclusive

IEC 61850-7-2 Subclause 17.2.3.3.2 IEC 61850-8-1 Subclause 17.2.2
<u>Expected result</u> 1. DUT sends response with data access error "object-non-existent"
<u>Test description</u> 1. Client request GetBRCBValues with unknown BRCB object
<u>Comment</u>

sBrN2	Only trigger option GI	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.2.9 IEC 61850-8-1 Subclause 17.1.2		
<u>Expected result</u> 3. DUT does not send reports		
<u>Test description</u> 1. Configure an available BRCB using SetBRCBValues with all supported fields, BufTm=0, IntgPd=1000 and only trigger option general-interrogation 2. Client enables the BRCB, set RptEna to True 3. EQUIPMENT SIMULATOR forces several data changes of one or more data set members in the data set		
<u>Comment</u>		

sBrN3	Integrity period zero	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.2.9 IEC 61850-8-1 Subclause 17.2		
<u>Expected result</u> 4. DUT does not send integrity reports		
<u>Test description</u> 1. Configure an available BRCB using SetBRCBValues with trigger option Integrity and integrity period 0 2. Wait one minute 3. Client sets the BRCB RptEna to True (without synchronizing the BRCB by setting the BRCB EntryID) 4. Wait one minute 5. Client disables the BRCB		
<u>Comment</u>		

sBrN4	Incorrect configuration of BRCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.2.1 IEC 61850-8-1 Subclause 17.1.2, 8.1.3.4.3, Table 61		

<p><u>Expected result</u></p> <ol style="list-style-type: none"> DUT sends SetBRCBValues response- with data access error "temporarily-unavailable" DUT sends SetDataValues response- with data access error "object-access-denied" DUT sends SetBRCBValues response- with data access error "object-access-denied" DUT sends SetBRCBValues response- with data access error "object-value-invalid" DUT sends SetBRCBValues response- with data access error "temporarily-unavailable"
<p><u>Test description</u></p> <ol style="list-style-type: none"> Client configures and enables an available BRCB Client requests SetBRCBValues with a new valid value on each one of the following "dyn" attributes: RptID, DatSet, OptFlds, BufTm, TrgOps, IntgPd and the attributes PurgeBuf, EntryID Client disables the BRCB Client requests SetDataValues with one of the following attributes: ConfRev, SqNum, TimeOfEntry and Owner (when available) Client requests SetBRCBValues with the "fix" or "conf" attributes from step 2 Client requests SetBRCBValues with unknown DatSet (when DatSet is "dyn") Client enables a BRCB with empty DatSet
<p><u>Comment</u></p>

sBrN5	Exclusive use of BRCB	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2 IEC 61850-8-1 Subclause 17.2		
<p><u>Expected result</u></p> <ol style="list-style-type: none"> DUT sends SetBRCBValues response- with data access error "temporarily-unavailable" 		
<p><u>Test description</u></p> <ol style="list-style-type: none"> Client1 configures and enables an available BRCB Client2 configures the same BRCB by requesting SetBRCBValues with one of the following dynamic ("dyn") attributes RptID, DatSet, OptFlds, BufTm, TrgOps, IntgPd, PurgeBuf, EntryID Client1 disables the BRCB 		
<p><u>Comment</u></p>		

sBrN8	Trigger option GI not set	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 17.2.3.2.2.9 IEC 61850-8-1 Subclause 17.2		
<p><u>Expected result</u></p> <ol style="list-style-type: none"> DUT sends SetBRCBValues response+ DUT sends SetBRCBValues response+, however sends no GI report DUT sends SetBRCBValues response+ DUT sends SetBRCBValues response- with data access error "temporarily unavailable" DUT sends SetBRCBValues response+ DUT sends SetBRCBValues response+ and sends no GI report DUT sends SetBRCBValues response+ and does send the GI report 		

Test description

1. Client configures and enables an available BRCB without trigger option general-interrogation
2. Client requests SetBRCBValues with GI=TRUE
3. Client disables the BRCB and set trigger option general-interrogation
4. Client requests SetBRCBValues with GI=TRUE
5. Client enables the BRCB
6. Client requests SetBRCBValues with GI=FALSE
7. Client requests SetBRCBValues with GI=TRUE

Comment

A4.10a GOOSE Publish

Abstract test cases

Test case	Test case description
sGop1	Request GetLogicalNodeDirectory(GoCB) and request GetGoCBValues (IEC 61850-7-2 Subclause 18.2.2.5 and 10.2.2)
sGop2	GOOSE messages are published with a long (SCL maxtime) cycle time, check the GOOSE data with configured data; (IEC 61850-7-2 Subclause 18.2.3) <ul style="list-style-type: none"> - <u>gocbRef</u> is a valid GoCB reference - <u>timeAllowedtoLive</u> > 0 and the next GOOSE message is transmitted within the specified value of the current GOOSE message - <u>datSet</u> is same as the GoCB and SCL and contains a valid dataset reference - <u>goID</u> is same as the GoCB and SCL, the default value is the GoCB reference - <u>t</u> contains the time of the status increment or start-up - <u>sqNum</u> is incremented, stNum>0 and isn't changed - <u>Simulation</u> is not present or if present with value FALSE - <u>confRev</u> >0 and is same as the GoCB and SCL (IEC 61850-7-2 Subclause 18.2.1.6) - <u>needsCommissioning</u> is not present or if present same as GoCB - <u>numDatSetEntries</u> matches with the number of data entries in allData - <u>allData</u> values match with the datSet element type
sGop3	Verify that a newly activated device sends the initial GOOSE message with stNum initial value one (1) (IEC 61850-7-2 Subclause 18.1 and 18.2.3)
sGop4	Force a data change of a data value in the GOOSE dataset, DUT shall publish GOOSE messages as specified/configured (SCL mintime), stNum is incremented, sqNum = 0
sGop5	When supported, verify that the DUT publishes GOOSE messages with the simulation flag set (IEC 61850-7-2 Subclause 18.2.3.8)
sGop6	Disable GoCB, verify that changing parameters with SetGoCBValues are active (IEC 61850-7-2 Subclause 18.2.1.3 and 18.2.2) and no GOOSE messages are transmitted anymore
sGop7	Verify that after a restart the device keeps the same Configuration revision value in the GoCB and GOOSE messages (IEC 61850-7-2 Subclause 18.2.1.6)
sGop8	Verify that ConfRev increments every time when the configuration of the data set referenced by DatSet has been changed (IEC 61850-7-2 Subclause 15.2.1.6). Changes that are counted are: <ul style="list-style-type: none"> - deletion of a member of the data-set - re-ordering of members in the data-set - changing the value of the attribute DatSet
sGop9	Verify that GoCB attribute NdsCom is set when DatSet is not yet configured (is NULL) (IEC 61850-7-2 Subclause 18.2.1.7)
sGop10	Verify the DUT can send GOOSE messages with data attributes and/or data objects
sGop11	Verify that the server can process a GoCB with maximum name length for DatSet, GoCBRef and GoID (IEC 61850-7-2 Subclause 22.2)

Note: sGop8 is not applicable for part 8-1

Test case	Test case description
sGopN1	When GoEna=TRUE, no attributes of the GoCB control block can be set except for GoEna. (IEC 61850-7-2 Subclause 18.2.1.3)
sGopN2	Verify that if the number or size of values being conveyed by the elements in the dataset exceeds the SCSSM determined maximum number, NdsCom is set to True. (IEC 61850-7-2 Subclause 18.2.1.7)

Detailed test procedures

sGop1	GetLogicalNodeDirectory(GoCB) and GetGoCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
--------------	--	--

IEC 61850-7-2 Subclause 18.2.2.5
IEC 61850-8-1 Subclause 18.1.2.3

Expected result

1. DUT sends GetLogicalNodeDirectory(GoCB) response+ with a list of GoCB's. The GoCB shall be located in LLNO.
2. DUT sends GetGoCBValues response+, the returned values match with the SCL configured values

Test description

1. For each logical node Client requests GetLogicalNodeDirectory(GoCB)
2. For each GoCB Client requests GetGoCBValues

Comment

sGop2

GOOSE message

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 18.2.3.6+7
IEC 61850-8-1 Subclause 18.1, A.3, PIXIT: Gp3, Gp4, TISSUE#817

Expected result

- a) DUT sends valid GOOSE messages with valid references, time stamp, incrementing sequence number, status number is the same, offset is variable (the GoCB.FixedOffs is false or is not available)
- b) DUT sends valid GOOSE messages with valid references, time stamp, incrementing sequence number, status number is the same, the GOOSE header and Data values use fixed length encoding according to table A.1 and A.2, the GoCB.FixedOffs is true

In both cases the GOOSE messages:

- gocbRef matches the SCL file
- timeAllowedtoLive > 0 and the next GOOSE message is transmitted within the specified value of the current GOOSE message
- datSet matches the SCL file and contains a valid dataset reference
- goID matches SCL file appID, the default value is the GoCB reference
- t contains the time of the status increment or start-up
- sqNum is incremented, stNum>0 and isn't changed
- Simulation value FALSE
- confRev >0 matches the SCL file (IEC 61850-7-2 Subclause 18.2.1.6)
- needsCommissioning is False
- numDatSetEntries matches with the number of data entries in allData
- allData values match with the datSet element type
- MAC address, APPID, VLAN ID and VLAN priority, match the SCL file
- Ethertype of Ethernet packet is 0x8100 and VLAN CFI = 0
- Ethertype of GOOSE is 0x88B8
- The slow retransmission time is close (±10%) to the MaxTime (SCL)

Test description

- a) Force no data change. Wait for several variable offset GOOSE messages
- b) Force no data change. Wait for several fixed offset GOOSE messages

Comment

Part a) is applicable

sGop3

Initial GOOSE message

- Passed
 Failed
 Inconclusive

IEC 61850-7-2 Subclause 18.3.2.2
IEC 61850-8-1 Subclause 18.1, PIXIT: Gp7

Expected result

1. DUT sends initial GOOSE message with stNum=1 and sqNum=0 or 1

<u>Test description</u>
1. Restart the DUT, enable GoCB when necessary, and wait for initial GOOSE
<u>Comment</u>

sGop4	GOOSE on data change	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.3.2.2 IEC 61850-8-1 Subclause 18.1, PIXIT: Gp5		
<u>Expected result</u>		
DUT sends GOOSE messages according to the configured retransmission strategy, the first retransmission does not exceed the SCL MinTime, stNum is incremented, sqNum = 0 in the first message after data change		
<u>Test description</u>		
1. Force a data change of a data value in the GoCB data set 2. Wait for GOOSE messages		
<u>Comment</u>		

sGop6	SetGoCBValues	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.1.3, 18.2.2.5, 18.2.2.6 IEC 61850-8-1 Subclause 18.1.1		
<u>Expected result</u>		
1. DUT sends a SetGoCBValues response+ and stops transmitting GOOSE messages 2. DUT sends a SetGoCBValues response+ and initializes/starts transmitting GOOSE messages. The first message has stNum=1		
<u>Test description</u>		
1. Client requests a SetGoCBValues with GoEna set to FALSE 2. Client requests a SetGoCBValues with GoEna set to TRUE		
<u>Comment</u>		

sGop7	Configuration revision after restart	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.1.6 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u>		
4. DUT sends GOOSE messages with the same ConfRev value as before the restart 5. DUT sends a GetGoCBValues response+ with the same ConfRev (not null) value as before the restart		
<u>Test description</u>		
1. Wait for several GOOSE messages 2. if supported, client sends GetGoCBValues request 3. Restart the DUT 4. Wait for several GOOSE messages 5. if supported, client sends GetGoCBValues request		

Comment

sGop9	DatSet not configured	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.1.7 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u> 1. DUT (including IED tool) either refuses the entire configuration or it ignores parts of the new configuration or it accepts the configuration. 2. DUT sends SetGoCBValues response- 3. DUT sends no GOOSE messages for GoCB with empty datSet 4. If DUT accepts configuration, GoCB.datSet is empty and GoCB.NdsCom is TRUE		
<u>Test description</u> 1. DUT is configured with a GSEControl element without the datSet 2. If supported, client sends SetGoCBValues request to enable this GoCB 3. Wait one minute after reconfiguration is completed 4. If supported, client sends GetGoCBValues request		
<u>Comment</u> Refused by configuration tool		

sGop10	GOOSE with data attributes (FCDA) and data objects (FCD)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u> a) DUT sends a GOOSE messages with data attributes b) DUT sends a GOOSE messages with data objects		
<u>Test description</u> a) Verify the DUT is able to send GOOSE message with data attributes (FCDA) b) Verify the DUT able to send GOOSE message with data objects (FCD)		
<u>Comment</u>		

sGop11	Max GoCB name length	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 22.2 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u> 1. DUT sends valid GOOSE messages where GoCBRef, (containing a GoCB of 32), GoID (129) and data set name (32) reflect the configuration 2. DUT sends GetGoCBValues response+ where GoID and DatSet reflect the configuration		
<u>Test description</u> 1. Configure DUT with GoCB with maximum name length (32, when not fixed), with maximum name length data set name (32, when not fixed) and GoID (129) 2. Client requests GetGoCBValues (when supported)		

Comment

sGopN1	Verify that GoCB components are read-only	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.2.3, 15.2.2.4 IEC 61850-8-1 Subclause 18.1.1		
<u>Expected result</u> 1. When supported DUT sends a SetGoCBValues response+ 2. DUT sends a SetGoCBValues response- 3. DUT sends a SetGoCBValues response- 4. DUT sends a SetGoCBValues response- 5. DUT sends a SetGoCBValues response- 6. DUT sends a SetGoCBValues response- 7. When supported DUT sends a SetGoCBValues response+		
<u>Test description</u> 1. Client requests a SetGoCBValues to disable GoEna 2. Client requests a SetGoCBValues with valid GoID 3. Client requests a SetGoCBValues with valid DatSet 4. Client requests a SetGoCBValues with valid DstAddress 5. Client requests a SetGoCBValues with optional MinTime, MaxTime 6. Client requests a SetGoCBValues with optional FixedOffs 7. Client requests a SetGoCBValues to enable GoEna		
<u>Comment</u> Note: Table 73 in 8-1 specifies that only GoEna may be written, other components are read-only		

A4.10b GOOSE Subscribe

Abstract test cases

Test case	Test case description
sGos1	Send GOOSE messages <u>with/without the VLAN tag</u> with new data and check if the message is received and the data has the new value by e.g. check binary output, event list, logging or MMI
sGos2	Send GOOSE messages with the ndsCom parameter set. Verify that on a status change the values are not used for operational purposes (IEC 61850-7-2 Subclause 18.2.3.8)
sGos3	Proper detection and action roll-over of sqNum with no status change (sqNum=max -> sqNum = 1) and with status change (sqNum=max -> sqNum = 0)
sGos4	Verify the logical node LGOS data object attribute values on receiving valid GOOSE messages, no GOOSE messages and GOOSE messages with mismatching ConfRev
sGos5	Verify that the server can subscribe to GOOSE messages with structured data (FCD)
sGos6	Send subscribed GOOSE messages with the Simulation parameter set (IEC 61850-7-2 Subclause 18.2.3.8). Verify that a when the subscriber is not in simulation mode (LPHD.Sim.stVal=false or not present) the simulated values are ignored. The subscriber shall keep on using the "real" GOOSE messages b when the subscriber is in simulation mode (LPHD.Sim.stVal=true) the simulated values are used for operational purposes. The subscriber shall ignore the "real" GOOSE messages after a first simulated one has been received . The corresponding LGOS.SimSt shall be set when the first simulated message is received and cleared when LPHD.Sim.stVal is set to false.
sGos7	Verify that the server can subscribe GOOSE messages with maximum name length for DataSet, GoCBRef and GoID (IEC 61850-7-2 Subclause 22.2)

Test case	Test case description
sGosN1	Check behaviour of DUT as specified in PIXIT on Missing GOOSE message
sGosN2	Check behaviour of DUT as specified in PIXIT on Double GOOSE message
sGosN3	Check behaviour of DUT as specified in PIXIT on Delayed GOOSE message, with and without exceeding timeAllowedToLive
sGosN4	Check behaviour of DUT as specified in PIXIT on Out of order GOOSE message
sGosN5	Check behaviour of DUT as specified in PIXIT on No GOOSE messages
sGosN6	Check behaviour of DUT as specified in PIXIT on invalid GOOSE messages <ul style="list-style-type: none"> - <u>goCbRef</u> different from GoCB and NULL - <u>timeAllowedtoLive</u> = 0 - <u>datSet</u> different from GoCB and NULL - <u>goID</u> different from GoCB and NULL - <u>t</u> contains the time of a status change minus/plus one hour - <u>confRev</u> different from GoCB and NULL - <u>numDataSetEntries</u> 0, more, less with the number of data entries in the allData - <u>allData</u> values do not match with the datSet element type

Detailed test procedures

To perform the DUT subscribe test procedures the DUT need to be configured as follows:

- a data value that is connected to a subscribed GOOSE member, e.g. GGIO.SPS01
- a data set that contains the value of this data point
- a GoCB that publishes this data set (or a RCB that sends a data change/quality change report)

As such the analyzer trace files contain the proof when the subscribed GOOSE messages are processed.

sGos1	Subscribe GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3 IEC 61850-8-1 Subclause 18.1: PIXIT: Gs8		
<u>Expected result</u> a) and b) DUT updates the value and sends a GOOSE message with changed status value		
<u>Test description</u> Test engineer configures the DUT with subscribed GOOSE (ping-pong mechanism) a) Publisher sends GOOSE message with new data value with the VLAN tag b) Publisher sends GOOSE message with new data value without the VLAN tag		
<u>Comment</u>		

sGos2	Subscribe GOOSE with ndsCom set	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u> 2. DUT ignores the data value change		
<u>Test description</u> 1. Test engineer configures the DUT as specified 2. Publisher sends GOOSE message with new data value with NdsCom set		
<u>Comment</u>		

sGos3	SqNum roll-over with/without status change	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3 IEC 61850-8-1 Subclause 18.1 PIXIT: Gs4		
<u>Expected result</u> 1. DUT just receives the messages without any action 2. DUT just receives the messages without any action 3. DUT responds to the status change		

<u>Test description</u> 1. Publisher sends GOOSE message with sqNum = max-1, max and 1 without status change 2. Publisher sends GOOSE message with sqNum = max-1, max 3. Publisher forces a status change stNum and sends a GOOSE message with incremented stNum and sqNum=0
<u>Comment</u>

sGos5	Subscribe to data set with structured data (FCD)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3 IEC 61850-8-1 Subclause 18.1 PIXIT: Gs8		
<u>Expected result</u> 2. DUT responds to the status change		
<u>Test description</u> 1. Publisher sends GOOSE message with structured data 2. Publisher sends GOOSE message with a data change in a data attribute in the structured data		
<u>Comment</u>		

sGos6	Subscribe GOOSE with simulation parameter set	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-1 Subclause 7.8.2 IEC 61850-7-2 Subclause 18.2.3.8 IEC 61850-8-1 Subclause 18.1 PIXIT:Gs9 TISSUE #1151		
<u>Expected result</u> a) LPHD.Sim.stVal = FALSE or not present 1. DUT accepts the normal GOOSE messages, LGOS.St = TRUE, LGOS.SimSt=FALSE 2. DUT ignores the simulated data value change, LGOS.St=TRUE, LGOS.SimSt=FALSE 3. DUT changes LGOS.St.stVal to FALSE (and keeps LGOS.SimSt = FALSE) b) LPHD.Sim.stVal = TRUE 5. DUT accepts the normal GOOSE messages because no simulated GOOSE messages have been received yet, LGOS.St=TRUE, LGOS.SimSt=FALSE state: subscription normal goose as long as no simulated goose received) 6. DUT changes LGOS.SimSt=TRUE (and keeps LGOS.St=TRUE); state: subscription simulated GOOSE 7. DUT accepts the simulated data value change 8. DUT changes LGOS.St to FALSE (and keeps LGOS.SimSt=TRUE); state: wait for simulated GOOSE 9. DUT ignores the normal GOOSE messages 10. DUT keeps LGOS.St=FALSE and LGOS.SimSt=TRUE 11. DUT changes LPHD.Sim.stVal to FALSE and LGOS.SimSt to FALSE (and keeps LGOS.St=FALSE); state: wait for normal GOOSE 12. DUT changes LGOS.St to TRUE (and keeps LGOS.SimSt=FALSE); state: subscription normal goose		

Test description

- a) LPHD.Sim=FALSE or not present
 1. Force the DUT to ignore simulated GOOSE messages when LPHD.Sim is present
 2. Publisher1 sends GOOSE message with a new data value with Simulation off
 3. Publisher2 sends GOOSE message with a new data value with Simulation set
 4. Publisher1 stops GOOSE message
- b) LPHD.Sim=TRUE
 5. Force the DUT to accept simulated GOOSE messages
 6. Publisher1 sends GOOSE message with a new data value with Simulation off
 7. Then publisher2 starts sending GOOSE message with Simulation set
 8. Publisher2 sends GOOSE message with a new data value with Simulation set
 9. Publisher2 stops sending GOOSE messages with Simulation set
 10. Publisher1 sends GOOSE message with a new data value with Simulation off
 11. Publisher1 stops sending GOOSE message with Simulation off
 12. Force DUT to accept normal GOOSE messages
 13. Publisher1 sends GOOSE message with a new data value with Simulation off

Comment

Part a) is applicable

sGos7	GOOSE with maximum name length for DataSet, GoCBRef and GoID	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3.8 IEC 61850-8-1 Subclause 18.1		
<u>Expected result</u> 1. The DUT accepts the GOOSE messages and data changes		
<u>Test description</u> 1. Configure the DUT to accept GOOSE messages with maximum name length for DataSet, GoCBRef and GoID		
<u>Comment</u>		

sGosN1	Missing GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 18.2.3 IEC 61850-8-1 Subclause 18.1 PIXIT: Gs3		
<u>Expected result</u> 3. DUT accepts GOOSE message as specified in the PIXIT, resulting in a report or published GOOSE message		
<u>Test description</u> 1. Test engineer configures the DUT as specified 2. Publisher sends correct GOOSE message with no value changes (same stNum) 3. Publisher sends GOOSE message with data value change with incremented stNum, starting with sqNum=1 (simulating a missing sqNum=0)		
<u>Comment</u>		

sGosN2	Double GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
---------------	-----------------------------	--

IEC 61850-7-2 Subclause 18.2.3
 IEC 61850-8-1 Subclause 18.1
 PIXIT: Gs5

Expected result

2. DUT accepts GOOSE messages
3. DUT accepts first GOOSE message with sqNum=0, resulting in published GOOSE messages and ignores the second message with sqNum=0

Test description

1. Test engineer configures the DUT as specified
2. Publisher sends correct GOOSE message with no value changes (same stNum)
3. Publisher sends GOOSE message with data value change with incremented stNum, and with sqNum=0 two times (simulating a double sqNum=0)

Comment

sGosN3	Delayed GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
---------------	------------------------------	--

IEC 61850-7-2 Subclause 18.2.3
 IEC 61850-8-1 Subclause 18.1
 PIXIT: Gs2

Expected result

3. DUT behaves as specified in the PIXIT

Test description

1. Test engineer configures the DUT as specified
2. Publisher sends correct GOOSE message with no value changes (same stNum)
3. Publisher sends GOOSE message with data value change with incremented stNum, and with sqNum=0, but outside the TimeAllowedtoLive interval of the previous GOOSE message. The following GOOSE messages with sqNum>0 are transmitted inside the TAL of the previous message.
- 4.

Comment

sGosN4	Out-of-order GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
---------------	-----------------------------------	--

IEC 61850-7-2 Subclause 18.2.3
 IEC 61850-8-1 Subclause 18.1, PIXIT: Gs4

Expected result

3. DUT behaves as specified in the PIXIT

Test description

1. Test engineer configures the DUT as specified
2. Publisher sends correct GOOSE message with no value changes (same stNum)
3. Publisher sends GOOSE message with data value change with incremented stNum, and with sqNum=1, sqNum=0, sqNum=2,3 etc.

Comment

sGosN5	No GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
---------------	-------------------------	--

IEC 61850-7-2 Subclause 18.2.3
IEC 61850-8-1 Subclause 18.1, PIXIT: Gs2

Expected result

3. DUT indicates that subscribed GOOSE message isn't received (PIXIT)
4. DUT indicates that subscribed GOOSE message is received again (PIXIT)
5. DUT indicates that subscribed GOOSE message isn't received (PIXIT)
6. DUT shall process new state value(s)

Test description

1. Test engineer configures the DUT as specified
2. Publisher sends correct GOOSE message with no value changes (same stNum)
3. Publisher is disconnected from the network, continues to send GOOSE messages for 30 seconds with no state change (e.g. same stNum as step 2).
4. Publisher is reconnected to the network and continues to send GOOSE messages (same stNum)
5. Publisher is disconnected from the network, continues to send GOOSE messages for 30 seconds with no state change (e.g. same stNum as step 2).
6. Publisher is reconnected to the network and continues sends GOOSE messages indicating a state change (incremented stNum, sqNum other than 0)

Comment

sGosN6	Invalid GOOSE message	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
---------------	------------------------------	--

IEC 61850-7-2 Subclause 18.2.1, 18.2.3
IEC 61850-8-1 Subclause 18.1, Annex C, PIXIT: Gs1

Expected result

DUT responds as specified in the PIXIT

Test description

- Test engineer configures the DUT as specified below and Publisher sends several GOOSE message with data value change with correct status & sequence numbers with:
- a GoCB reference = mismatch with SCL, NULL
 - b timeAllowedtoLive = 0
 - c datSet reference = mismatch with GoCB from SCL, NULL
 - d goID reference = mismatch with GoCB from SCL, NULL
 - e timestamp of status change = plus one hour, minus one hour, 0
 - f confRev = mismatching with GoCB from SCL
 - g numDatSetEntries = mismatch with the expected number of DataSet element members from SCL. The confRev remains as expected, but the numDatSetEntries changes +1 and then -1 and the allData matches the number of numDatSetEntries (+1 add one value at the end and -1 remove last value)
 - h values of allData entries (same DataSetReference, same expected ConfRev) = data type values out-of-order
 - i APPID = mismatch from GoCB from SCL and 0

Comment

A4.11 Control

Abstract test cases

Test case	Test case description
sCt1	Force and check each path in control state machine for several control objects with control models a direct with normal security (IEC 61850-7-2 Subclause 20.2.1) b SBO-control with normal security (IEC 61850-7-2 Subclause 20.2.2) c direct with enhanced security (IEC 61850-7-2 Subclause 20.3.2) d SBO-control with enhanced security (IEC 61850-7-2 Subclause 20.3.3) e Compare detailed test cases for each control model
sCt2	Change control model using online services and verify that the control object responds according to the new control model
sCt3	Time Operate a second enhanced security control object before the activation time of the first control object (PIXIT)
sCt4	Verify that the stSeld attribute value is set/reset as specified in the state machines
sCt5	Verify test flag in SelectWithValue/Operate and Beh = test (IEC 61850-7-4 Annex A Table A.1) <ul style="list-style-type: none"> When LN Beh is "on" the control Requests are rejected with AddCause "Blocked-by-mode" When LN Beh is "test/blocked" the control requests are accepted When LN Beh is "test" the control requests are accepted
sCt6	Select all SBO control objects and cancel them in opposite order. In case a control action is blocked because another control is already running the AddCause shall be "1-of-n-control"
sCt7	Verify that with interlock or synchro check conditions the specified checks are performed and the command is executed accordingly (IEC 61850-7-2 Subclause 20.5.2.5) <ul style="list-style-type: none"> When the interlock check fails with AddCause "Blocked-by-interlocking" When the interlock check passes When the synchro check fails with AddCause "Blocked-by-synchrocheck" When the synchro check passes
sCt8	Operate (without select) a SBO control object and verify that the request is rejected with AddCause "Object-not-selected" (IEC 61850-7.2 table 47)
sCt9	Select the same control object twice, verify that the second select request is rejected with AddCause "Object-already-selected" (IEC 61850-7-2 table 47) and the object remains in selected state (Operate.req is accepted)
sCt10	Operate control value is the same as the actual status value (On-On or Off-Off) and verify that the control request is rejected with AddCause "Position-reached" (IEC 61850-7-2 table 47, PIXIT)
sCt11	Select the same control object from 2 different clients. Verify that the control requests from the second client are rejected with AddCause "Locked-by-other-client" (IEC 61850-7-2 table 47)
sCt12	Select / Operate a unknown control object and verify that the control requests are rejected with AddCause "Unknown" (IEC 61850-7-2 table 47)
sCt13	Verify that the Select request on a direct operate control object is rejected with AddCause "Not-supported" (IEC 61850-7-2 table 47)
sCt14	Operate the same direct control object twice from 2 clients (IEC 61850-7-2 table 54, PIXIT) and verify that the last control request is rejected with AddCause "Command-already-in-execution"
sCt15	Verify that on LN behaviour off or on/blocked control requests are rejected with AddCause "Blocked-by-Mode" (IEC 61850-7-4 Annex A)
sCt16	Verify that when Loc is set remote control requests are rejected with AddCause "Blocked-by-switching-hierarchy"
sCt17	Verify that with station level control authority (LocSta=T) remote control requests are rejected with AddCause "Blocked-by-switching-hierarchy".
sCt18	Verify that on CmdBlk.stVal is set the control requests are rejected with AddCause "Blocked-by-command" (IEC 61850-7-2 table 54)

sCtl19	Verify that when the blkEna is set the control requests are terminated with AddCause "Time-limit-over"
sCtl20	Verify that when parameters are changed after the select respond, the operate request is rejected with AddCause "Parameter-change-in-execution" (IEC 61850-7-2 table 54)
sCtl21	Verify that when tap changer has reached the limit (EndPosR or EndPosL in YLTC) control requests are rejected with AddCause "Step-limit" (IEC 61850-7-2 table 54)
sCtl22	Verify that with insufficient access authority control requests are rejected with AddCause "No-access-authority". (IEC 61850-7-2 table 54)
sCtl23	Verify that when an APC control action end position has overshoot the command terminates with AddCause "Ended-with-overshoot". (IEC 61850-7-2 table 54)
sCtl24	Verify that when an APC control action is aborted due to deviation between the command value and the measured value the control terminates with AddCause "Abortion-due-to-deviation". (IEC 61850-7-2 table 54)
sCtl25	Verify that a cancel request is successful when the control object is in the unselected state (IEC 61850-7-2 table 47)
sCtl26	Verify that when the control object is in the WaitForExecution state the cancel or SelectWithValue request is rejected with AddCause "Command-already-in-execution" (IEC 61850-7-2 table 54)
sCtl27	Verify that the SelectWithValue request on a SBOs control object is rejected with AddCause "Not-supported" (IEC 61850-7-2 table 54)

Note: sCtl12 and sCtl22 are not applicable for part 8-1

Detailed test procedures

sCtl5	Operate with test flag and test mode	<input type="checkbox"/> Passed <input type="checkbox"/> Failed <input checked="" type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 20.2 and 20.3 IEC 61850-7-4 Annex A IEC 61850-8-1 Subclause 20		
<u>Expected result</u> 1. Commands are not accepted with AddCause = blocked-by-mode 2. Control commands are accepted and executed 3. Commands are not accepted with AddCause = blocked-by-mode 4. Control commands are accepted, however output is not activated (blocked) 5. Commands are not accepted with AddCause = blocked-by-mode For normal security the AddCause is optional		
<u>Test description</u> a) DOns 1. LN.Beh = on and client sends correct control command with test flag set If Beh = test is supported perform steps 2 and 3 2. LN.Beh = test and client sends correct control command with test flag set 3. LN.Beh = test and client sends correct control command without test flag set If Beh = test-blocked is supported perform step 4 and 5 4. LN.Beh = test-blocked and client sends correct control command with test flag set 5. LN.Beh = test-blocked and client sends correct control command without test flag set b) Repeat step 1 to 5 for SBOs c) Repeat step 1 to 5 for DOEs b) Repeat step 1 to 5 for SBOes		

Comment

Note 1: Step 1 is mandatory

Note 2: To change the Beh the client can operate the Mod. The Mod.Operate.Test attribute value shall be ignored by the DUT

Part a) is applicable

The test result is inconclusive because the only controllable object in the datamodel is Mod. And Mod shall be controllable independent of its value.

sCtl10	SelectWithValue or Operate value is same as actual value	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 20 IEC 61850-8-1 Subclause 20.6, 20.7 and 20.8, PIXIT: Ct5		
<u>Expected result</u> a DUT responds as specified in PIXIT b DUT responds as specified in PIXIT c DUT responds as specified in PIXIT d DUT responds as specified in PIXIT Allowed AddCause values are "position-reached" or "time-limit-over"		
<u>Test description</u> a DOns: Client sends Operate request with actual value of a DOns object b SBOns: Client sends Select and Operate request with actual value of a SBOns object c DOes: Client sends Operate request with actual value of a DOes object d SBOes: Client sends SelectWithValue request with actual value of a SBOes object, on response+ request Operate with actual value		
<u>Comment</u> Part a) is applicable		

A4.11a Control DOns

Abstract test cases

Test case	Test case description
sDOns1	Send a correct Operate request
sDOns2	Send an Operate request, resulting in 'Test not ok'
sDOns3	Send an TimeActivatedOperate, request resulting in response-
sDOns4	Send a correct TimeActivatedOperate request Verify the TimeActivatedOperateTermination+
sDOns5	Send a correct TimeActivatedOperate request Verify each of these paths will return the device to the Ready state and the TimeActivatedOperateTermination-: – Force a 'Test not ok' – Send a correct Cancel request

sDOns3 is not applicable for part 8-1 (compare TISSUE #783, part 8-1 does not support Authentication).

Detailed test procedures for DOns

sDOns1	Operate	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 20.2.1 IEC 61850-8-1 Subclause 20.7		
<u>Expected result</u> 1. DUT responds with Operate response+		
<u>Test description</u> 1. Client sends correct Operate request		
<u>Comment</u>		

sDOns2	Operate response-	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 20.2.1 IEC 61850-8-1 Subclause 20.7, PIXIT: Ct12		
<u>Expected result</u> 1. DUT responds with Operate response-		
<u>Test description</u> 1. Client requests Operate forcing a "test not ok" as specified in PIXIT		
<u>Comment</u>		

A4.12 Time synchronization

Abstract test cases

Test case	Test case description
sTm1	Verify the DUT supports and executes the SCSM time synchronisation as configured in SCL
sTm2	Check report/logging timestamp accuracy and leap seconds known matches the documented timestamp quality of the server
sTm3	Verify that when the device supports time zones and daylight saving the time stamp of events and disturbance records are UTC time
sTm4	Verify the time management settings in logical node LTIM
sTm5	Verify the time master supervision in logical node LTMS

Test case	Test case description
sTmN1	Verify that when time synchronisation communication lost is detected after a specified period
sTmN2	On synchronisation error, deviation beyond time stamp tolerance shall be detected

Detailed test procedures

sTm1	SCSM time synchronisation (SNTP)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 21 and 6.1.2.9.3 IEC 61850-8-1 Subclause 21 and 6.4.2 PIXIT: Tm3, Tm8		
<u>Expected result</u> 2. DUT sends the base UTC time value in the report-time-stamp, or GOOSE timestamp and data value timestamp. Verify that the timestamp value is accurate +/-10second compared to the time in the time server 4. DUT sends the new UTC time value in the report-time-stamp, or GOOSE timestamp and data value timestamp. Sending reports or GOOSE shall not be delayed by a time change. 6. DUT sends the new UTC time value in the report-time-stamp, or GOOSE timestamp and data value timestamp. Sending reports or GOOSE shall not be delayed by a time change.		
<u>Test description</u> 1. Configure <ul style="list-style-type: none"> • One SNTP time master • An URCB or BRCB with all optional fields with trigger option data-change and BufTm = 0 with FCD dataset elements (when supported) • A GOOSE with FCD dataset elements (when supported) • Client requests GetDataValues after each event (when reporting is not supported and when GetDataValues is supported) 2. Force an event using the EQUIPMENT SIMULATOR or subscribed GOOSE message 3. Test engineer changes the time at least +2 minutes in the TIME MASTER and wait till DUT takes over the new time (PIXIT) 4. Force an event using the EQUIPMENT SIMULATOR or subscribed GOOSE message 5. Test engineer changes the time at least -2 minutes in the TIME MASTER and wait till DUT takes over the new time (PIXIT) 6. Force an event using the EQUIPMENT SIMULATOR or subscribed GOOSE message		
<u>Comment</u>		

sTm2	Time stamp quality	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
------	--------------------	--

IEC 61850-7-2 Subclause 21 and 6.1.2.9.3
 IEC 61850-8-1 Subclause 21 and 6.4.2, table 32
 PIXIT: Tm1

Expected result

2. The TimeStamp – TimeQuality – TimeAccuracy matches with the documented resolution (PICS-T2) and the TimeStamp – TimeQuality – LeapSecondsKnown; matches with the PIXIT

Test description

1. Force an event using the EQUIPMENT SIMULATOR or subscribed GOOSE message
2. Client requests GetDataValues of the event or waits for a Report/GOOSE message with the state change

Comment

Verifying the timestamp accuracy is out-of-scope for the conformance test.

sTm3	Time zone and daylight saving of events and disturbance records	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 21 and 6.1.2.9.3 IEC 61850-8-1 Subclause 21, 6.4.2 and 23.1 PIXIT: Tm9		
<u>Expected result</u> <ol style="list-style-type: none"> 3. The time stamp is still UTC time, the local time includes time zone and daylight saving 5. The start/stop time stamp of the COMTRADE.cfg is UTC or local time (PIXIT) 		
<u>Test description</u> <ol style="list-style-type: none"> 1. Configure DUT with a non-zero UTC offset 2. Force an event using the EQUIPMENT SIMULATOR 3. Client requests GetDataValues of the event 4. Force the creation of a disturbance record 5. Client gets the disturbance record file 		
<u>Comment</u>		

sTmN1	Lost time synchronisation	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 21 and 6.1.2.9.3 IEC 61850-8-1 Subclause 21 and 6.4.2 PIXIT: Tm2, Tm5		
<u>Expected result</u> <ol style="list-style-type: none"> 1. DUT detects the lost time synch 2. DUT updates the event 3. DUT sends GetDataValues response+ or Report/GOOSE with time quality "ClockNotSynchronized" 		
<u>Test description</u> <ol style="list-style-type: none"> 1. Test engineer disconnects all time masters and waits specified period 2. Force an event using the EQUIPMENT SIMULATOR or subscribed GOOSE message 3. Client requests GetDataValues of the event or waits for a Report/GOOSE message with the state change 		
<u>Comment</u>		

A4.13 File transfer

Abstract test cases

Test case	Test case description
sFt1	Request a GetServerDirectory(FILE) with correct parameters and verify the response (IEC 61850-7-2 Subclause 7.2.2, PIXIT)
sFt2	For each responded file: <ul style="list-style-type: none"> - request a GetFile with correct parameters and verify the response (IEC 61850-7-2 Subclause 23.2.1) - request a GetFileAttributeValues with correct parameters and verify the response (IEC 61850-7-2 Subclause 23.2.4) - request a DeleteFile with correct parameters and verify the response (IEC 61850-7-2 Subclause 23.2.3)
sFt3	Verify the SetFile service with a small and large file and the maximum number of maximum sized file
sFt4	Request a GetFile from two clients simultaneously if more than one client association is supported (PIXIT)
sFt5	Request a GetServerDirectory(FILE) with the wildcard parameter and verify the response (IEC 61850-7-2 Subclause 7.2.2)

Test case	Test case description
sFtN1	Request following file transfer services with an unknown file name and verify the appropriate response-service error <ul style="list-style-type: none"> - GetFile (IEC 61850-7-2 Subclause 23.2.1) - GetFileAttributeValues (IEC 61850-7-2 Subclause 23.2.4) - DeleteFile (IEC 61850-7-2 Subclause 23.2.3)

Detailed test procedures

sFt1	GetServerDirectory(FILE)	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 7.2.2, 23.1.1 IEC 61850-8-1 Subclause 23 PIXIT: Ft2, Ft3, Ft4		
<u>Expected result</u> 1. DUT sends GetServerDirectory(FILE) response+ with a list of all files in any order. The MMS FileName shall consist of a sequence of file paths and a name-of-a-file. Files names have up to 64 chars, a '.' and a maximum 3 octet extension (max 255 chars in total inclusive path). 2. DUT sends GetServerDirectory(FILE) response+ with a list of files, continuing after the file specified in the request.		
<u>Test description</u> 1. Client requests GetServerDirectory(FILE) with empty file specification 2. Client requests GetServerDirectory(FILE) with a continueAfter file specification		
<u>Comment</u>		

sFt2	GetFile, GetFileAttributeValues, DeleteFile	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 23.2.1, 23.2.4, 23.2.3 IEC 61850-8-1 Subclause 23.2.1, 23.2.3, 23.2.4 PIXIT: Ft4		

<u>Expected result</u> a DUT sends GetFile response+ and sends the contents of the file b DUT sends GetFileAttributeValues response+ c DUT sends DeleteFile response+
<u>Test description</u> For each responded file: a Client requests GetFile with correct parameters b Client requests GetFileAttributeValues with correct parameters c Client requests DeleteFile with correct parameters
<u>Comment</u> Part a-b are applicable

sFt4	Simultaneous GetFile from 2 clients	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 23.2.1 IEC 61850-8-1 Subclause 23.2.1 PIXIT: Ft8		
<u>Expected result</u> 1. DUT sends GetFile response+ 2. DUT sends GetFile response+ or response- "file busy" (PIXIT)		
<u>Test description</u> 1. Client1 requests GetFile 2. Client2 requests GetFile of the same file while the first GetFile is still in progress		
<u>Comment</u>		

sFt5	GetServerDirectory(FILE) with wildcard	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 7.2.2 IEC 61850-8-1 Subclause 9.3, 23		
<u>Expected result</u> 1. DUT sends GetServerDirectory(FILE) response+ with a list of all files		
<u>Test description</u> 1. Client requests GetServerDirectory(FILE) with file specification "*"		
<u>Comment</u>		

sFtN1	GetFile, GetFileAttributeValues, DeleteFile with unknown file name	<input checked="" type="checkbox"/> Passed <input type="checkbox"/> Failed <input type="checkbox"/> Inconclusive
IEC 61850-7-2 Subclause 23.2.1, 23.2.4, 23.2.3 IEC 61850-8-1 Subclause 23.2		
<u>Expected result</u> a) DUT sends GetFile response- with MMS service error "file file-non-existent" b) DUT sends GetFileAttributeValues response- with MMS service error "file file-non-existent" c) DUT sends DeleteFile response- with MMS service error "file file-non-existent"		

Test description

- a) Client requests GetFile with unknown file
- b) Client requests GetFileAttributeValues with unknown file
- c) Client requests DeleteFile with unknown file

Comment

Part a-b are applicable



ABOUT DNV GL

Driven by our purpose of safeguarding life, property and the environment, DNV GL enables organizations to advance the safety and sustainability of their business. We provide classification and technical assurance along with software and independent expert advisory services to the maritime, oil and gas, and energy industries. We also provide certification services to customers across a wide range of industries. Operating in more than 100 countries, our 16,000 professionals are dedicated to helping our customers make the world safer, smarter and greener.